"*" Pivot Dimension

RoHS Component

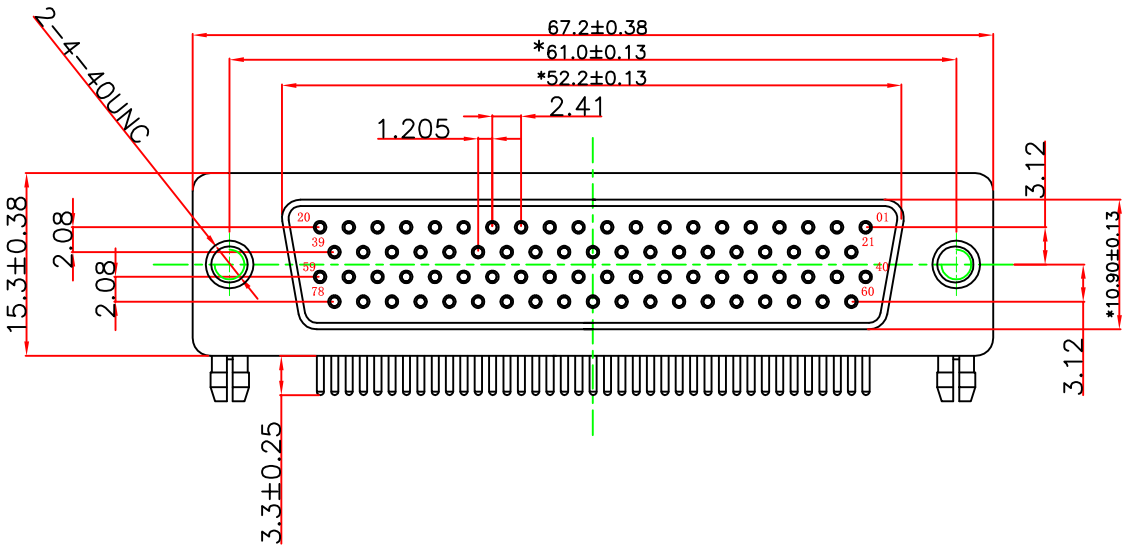



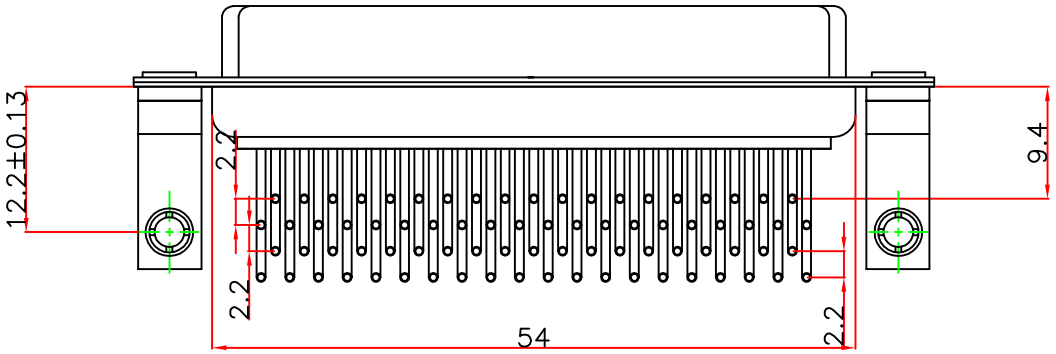

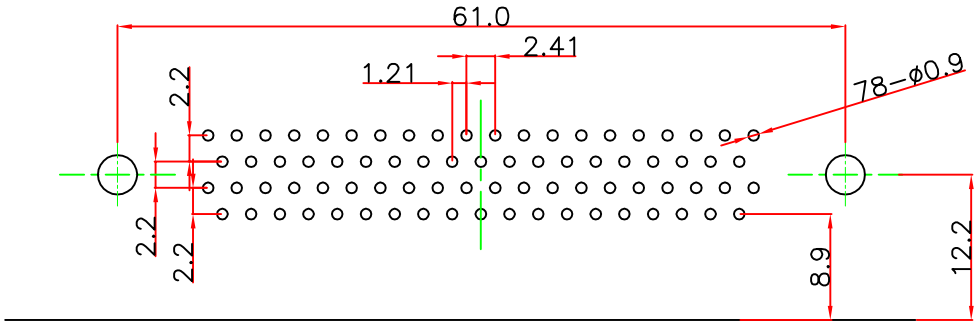

PCB LAYOUT

NOTICE :

1. ELECTRICE:
   - DIELECTRIC RATING: 300V
   - CONTACT CURRENT RATING: 3AMP
   - CONTACT RESISTANCE: 15mΩ MAX.
   - INSULATION RESISTANCE: 1000MΩ MIN.AT 500V DC
   - DIELECTRIC STRENGTH: 500V AC RMS FOR 1MINUTE

OPERATION TEMPERATURE: -55C° ～125C°

2. MATERIAL:
   - INSULATOR: PBT+30% G.F(UL94V-0)
   - CONTACT: COPPER ALLOY
   - CONTACT PLATED:GOLD FIASH OVER NICKEL
   - SHELL: SPCC
   - SHELL PLATED:NICKEL/TIN

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X.X ±0.38, X.XX ±0.25, X.XXX ±0.13, X.° ±5°, X.X° ±2°	DRAWED BY : 杨冬梅	DATE : 2009.11.21	PART NAME: HDR 78 母 弯焊板式铆12.2支架 H=9.4	
	CHECKED BY: 余飞仙	DATE : 2009.11.25	DRAW NO.	XHY-06-0168
UNIT: mm [inch]	APPROVED BY: 胡 超	DATE : 2009.11.25	PART NO.	HDR078FH13000090000094
SCALE:1:1	SIZE: A4		REMARK	
			MOLD NO.	