
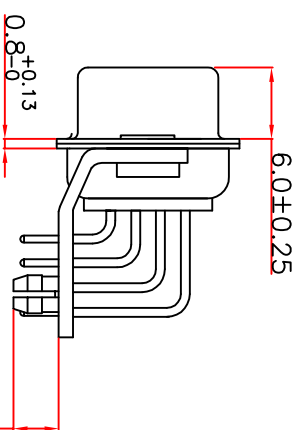


“\*” Pivot Dimension

RoHS Component

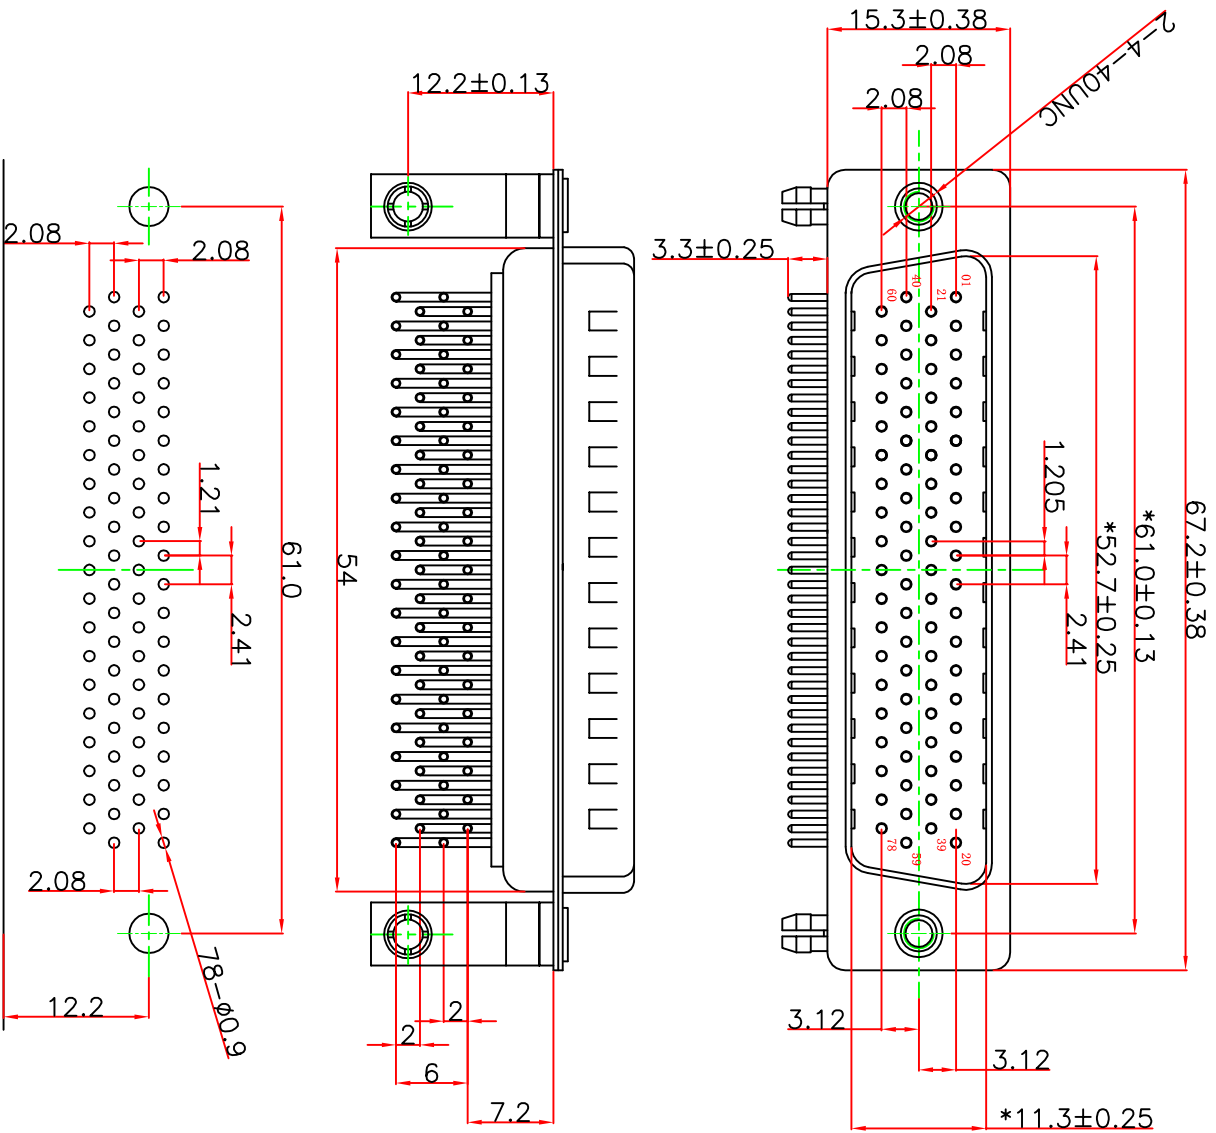

NOTICE :

1. ELECTRIC:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 3AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC

DIELECTRIC STRENGTH: 500V AC RMS for 1Minute

OPERATION TEMPERATURE: -55°C ~ 125°C

2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)

CONTACT : COPPER ALLOY

CONTACT PLATED: GOLD FLASH OVER NICKEL

SHELL : SPCC

SHELL PLATED: NICKEL/TIN

BRACKET: COPPER ALLOY PLATED NI



**东莞市讯源精密连接器有限公司**  
Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:

X.X ±0.38

X.XX ±0.25

X.XXX ±0.13

X'. ±5° X.X' ±2'

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY: 杨冬梅

DATE: 2009. 11. 21

CHECKED BY: 奈飞仙

DATE: 2009. 11. 25

APPROVED BY: 胡超

DATE: 2009. 11. 25

PART NAME: HDR 78 公 弯焊板式 2.2 克架 1#7.2

DRAW NO. XHY-06-0163

PART NO. HDR078MH130000900000072

REMARK

MOLD NO.