

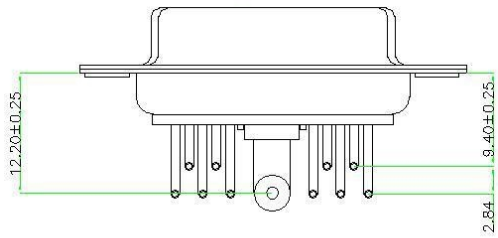




“*” Pivot Dimension

ROHS Component

PO(X)	电流额定值(A)	mA	PCB 间距
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

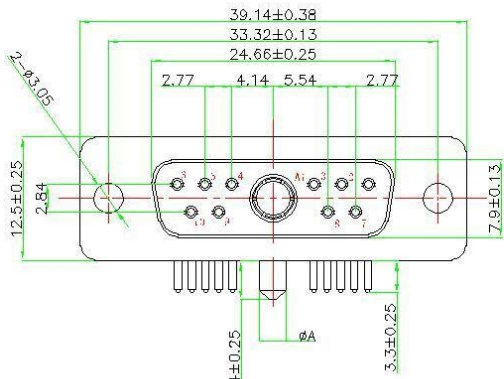

PCB LAYOUT

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V 0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10,20,30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING: 55" ~125" .



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X. +0.38 X.X +0.25 X.XX +0.13 X.' +5' X.X' +2'	DRAWN BY : 杨剑兵	DATE : 2010.05.15	PART NAME: 1191 母 电流旁焊板式传统插座	
	CHECKED BY: 侯应文	DATE : 2010.05.15	PART NO. MOLD NO.	MIN 05 2006 PR11W1PXH0000000000000
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 胡超	DATE : 2010.05.15	REMARK	
			DRAW NO.	