
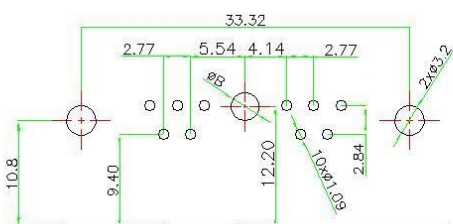
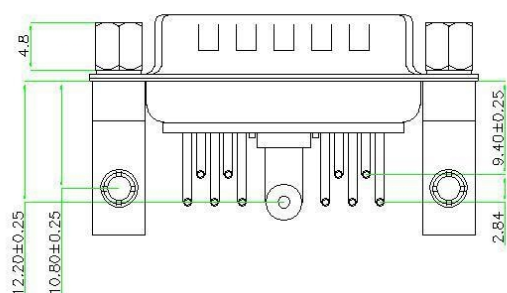
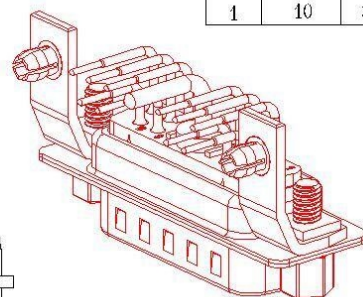



ROHS Component

PO(X)	电压/V	电流/A	PCB 温度/℃
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

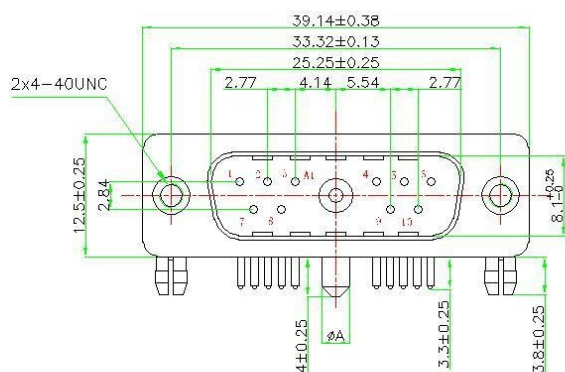

PCB LAYOUT

SHELL: STEEL OR COPPER ALLOY MATERIAL, TIN/NI OR AU FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
BRACKET/SCREW: COPPER ALLOY MATERIAL, NI PLATED.

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 10 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: 55° ~ 125°.



Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X. +0.38		杨剑 卡		2010. 05. 15		1171 电 压铸模板式卸10.8 支架	
X.X +0.25						领4 40LCW4. 8轴冷	
X.XX +0.15		CHECKED BY:		DATE :		PART NO. XHY 05 2023	
X.' +5' X.X' +5'		侯应文		2010. 05. 15		MOLD NO. PR11W1MX1100000000000	
		APPROVED BY:		DATE :		REMARK	
UNIT: mm [inch]		胡超		2010. 05. 15		DRAW NO.	
SCALE:1:1		SIZE: A4					