
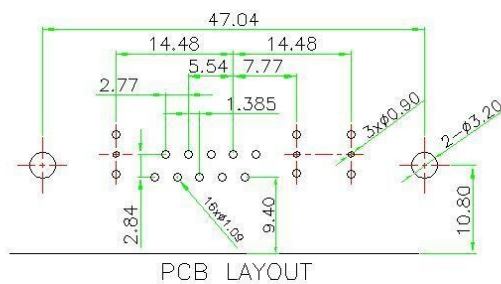
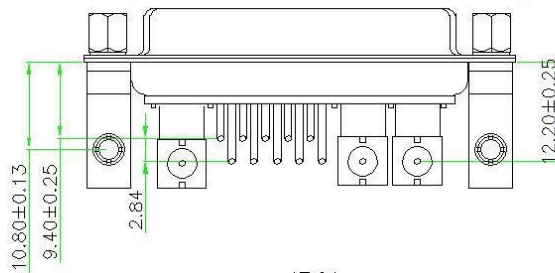



“*” Pivot Dimension

ROHS Component

PO(X)	PROCESSING Q
5	50
7	75

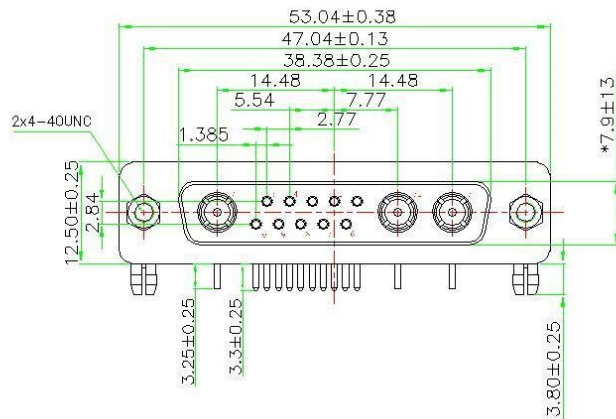

PCB LAYOUT

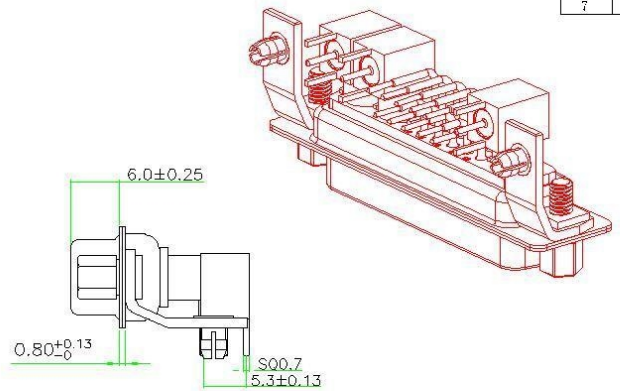

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V 0 RATED.
HIGH FREQUENCY CONTACT :COPPER ALLOY MATERIAL,GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
BRACKET/SCREW:COPPER ALLOY MATERIAL,Ni PLATED.

ELECTRICAL CHARACTERISTICS

HIGH FREQUENCY CONTACT CURRENT RATING:50 OR 75 OHM.
THE RADIO FREQUENCYRANGE:0~3GHz.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH FREQUENCY CONTACT RESISTANCE:10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ 125° .



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.08 XX ±0.25 XXX ±0.13 X* ±5° XX* ±2°	DRAWN BY :	DATE :	PART NAME:
	杨剑书	2010.05.15	13W3 公 射频弯片板式转10.8支架 轴1 10UNC±1.8螺丝
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.
	侯应文	2010.05.15	XIY-05-2234
	APPROVED BY:	DATE :	MOLD NO.
	胡超	2010.05.15	FR13W3FXI1000000000000
			REMARK
			DRAW NO.