
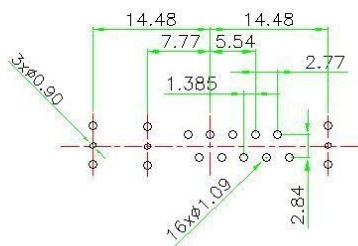
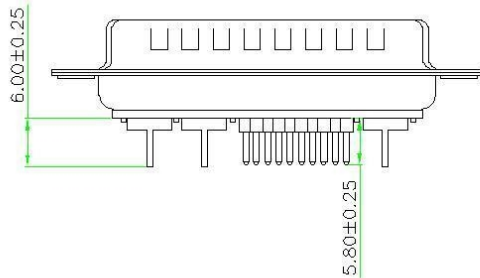
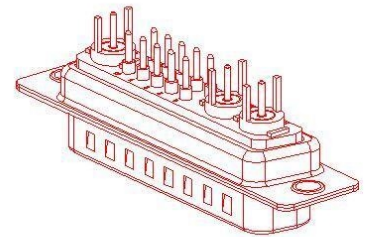



“*” Pivot Dimension

ROHS Component

P0(X)	Category	Q
5		50
7		75

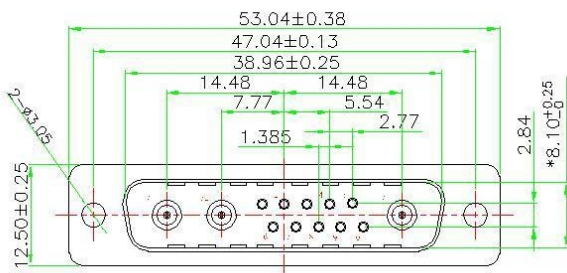

PCB LAYOUT

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V 0 RATED.
 HIGH FREQUENCY CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH FREQUENCY CONTACT CURRENT RATING:50 OR 75 OHM.
 THE RADIO FREQUENCYRANGE:0~3Ghz.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
 THE WORKING VOLTAGE:300V.
 HIGH FREQUENCY CONTECT RESISTANCE:10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING: -55° ~ 125° .



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.08 XX ±0.25 XXX ±0.13 X* ±5° XX* ±2°	DRAWN BY :	DATE :	PART NAME:	
	杨剑书	2010.05.15	1383 公 射频频片板式传统锡合	
	CHECKED BY:	DATE :	PART NO.	XY-05-2211
	侯应文	2010.05.15	MOLD NO.	FS13W3MX100000000000000
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY:	DATE :	REMARK	
	胡超	2010.05.15	DRAW NO.	