
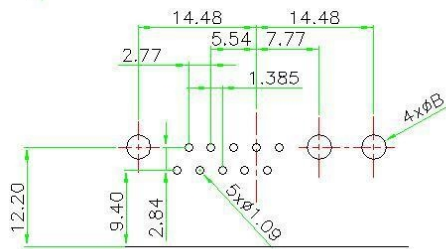
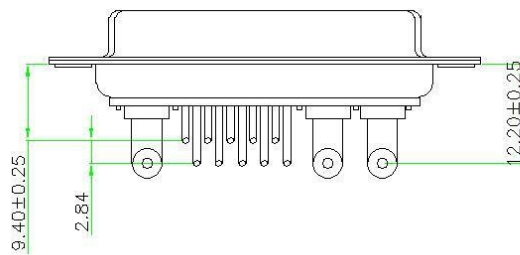
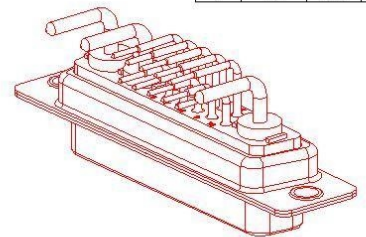



“*” Pivot Dimension

ROHS Component

PO (X)	额定电流 I _N	额定电压 U _N	PCB 厚度
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
1	10	3.8	1.10

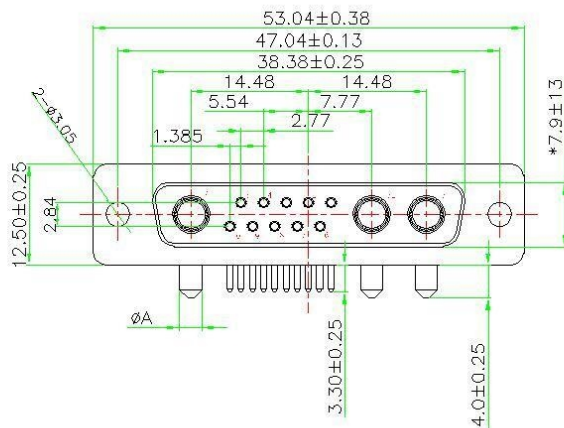

PCB LAYOUT

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, TIN/Ni OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V 0 RATED.
 HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 THE WORKING VOLTAGE: 300V.
 HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
 TEMPERATURE RATING: 55° ~ 125°.



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: X ±0.08 XX ±0.25 XXX ±0.13 X* ±0° XX* ±0°	DRAWN BY :	DATE :	PART NAME:
	杨剑书	2010.05.15	13*3 母 电流弯插板式传统锁合
	CHECKED BY:	DATE :	PART NO.
	侯应文	2010.05.15	XJY-05-2206
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY:	DATE :	MOLD NO.
	胡超	2010.05.15	FR13W3FXI00000000000000
			REMARK
			DRAW NO.