
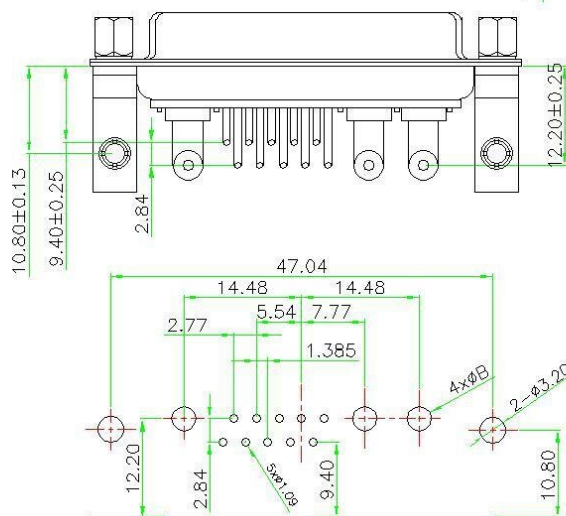



“*” Pivot Dimension

ROHS Component

PO 00	电 流 等 级	3A	PCB 3B
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
1	10	3.8	1.10

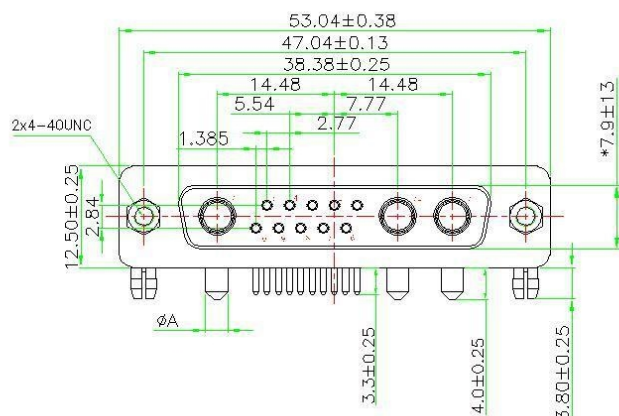

PCB LAYOUT

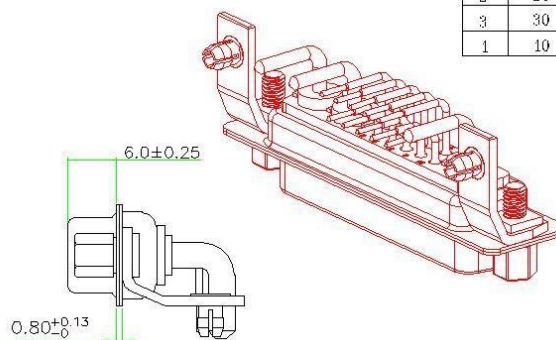

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED,UL 94V 0 RATED.
 HIGH POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
 BRACKET/SCREW:COPPER ALLOY MATERIAL,Ni PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING:10,20,30 OR 40 AMPS.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
 THE WORKING VOLTAGE:300V.
 HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING: -55° ~ 125° .



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.08 XX ±0.25 XXX ±0.13 X* ±5° XX* ±2°	DRAWN BY :	DATE :	PART NAME:
	杨剑书	2010.05.15	13#3 母 电流弯板式插10.8支架 插1 1000±1.8mm
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.
	侯应文	2010.05.15	XIY-05-2228
	APPROVED BY:	DATE :	MOLD NO.
	胡超	2010.05.15	FR13W3FXI0900000000000
			REMARK
			DRAW NO.