
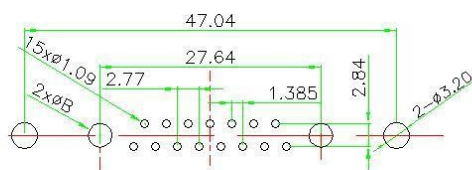
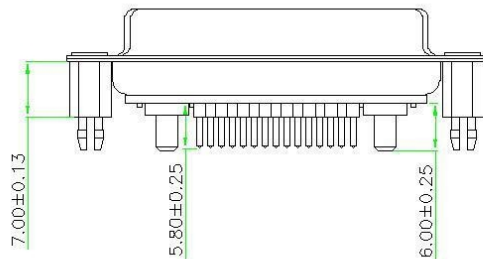
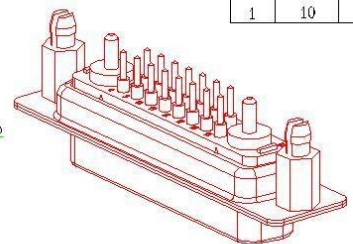



“*” Pivot Dimension

Rolls Component

FOOT	电 压 等 级	材 质	PCB 厚 度
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
1	10	3.8	1.10

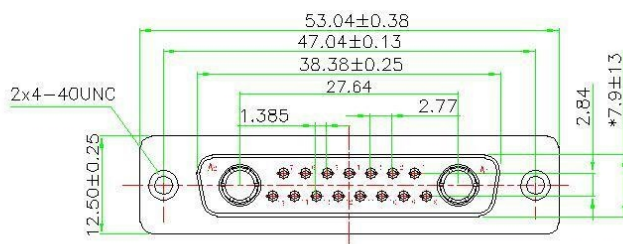

PCB LAYOUT

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,TIN NI OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 91V-0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL,GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
FORK:COPPER ALLOY , NI PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10,20,30 OR 10 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .



东莞市迅颖原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X* ±3° X* ±1° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 杨冬梅 CHECKED BY: 余飞仙 APPROVED BY: 陈 斌	DATE : 2009.09.11 DATE : 2009.09.12 DATE : 2010.01.30	PART NAME: 17*2 母 电 流 互 感 器 式 插 座 DRAW NO. XHY-05-2614 PART NO. PS17*2FXH08000000000000 REMARK MOLD NO.
--	--	--	--