






“*” Pivot Dimension

Rolls Component

P0(X)	尺寸/规格
5	50
7	75

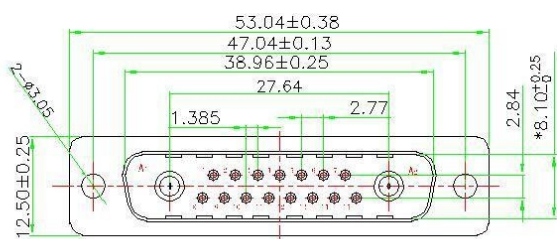

TUBE

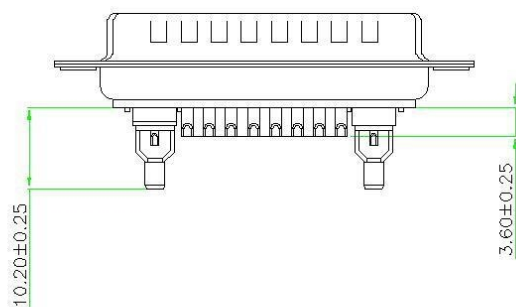

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, TIN NI OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 91V-0 RATED.
 HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH FREQUENCY CONTACT CURRENT RATING: 50 OR 75 OHM.
 THE RADIO FREQUENCY RANGE: 0~36GHz.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING: 5.0 AMP'S.
 THE WORKING VOLTAGE: 300V.
 HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
 TEMPERATURE RATING: -55° ~ +125°.



东莞市迅源原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X* ±3' XX' ±1' UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY: 杨冬梅	DATE: 2009.09.11	PART NAME: 17*2 公 射频焊线式传统耦合	
	CHECKED BY: 余飞仙	DATE: 2009.09.12	DRAW NO.	XHY-09-2609
	APPROVED BY: 蔡建	DATE: 2010.01.30	PART NO.	FB17*2MXH000000000000
			REMARK	
			MOLD NO.	