
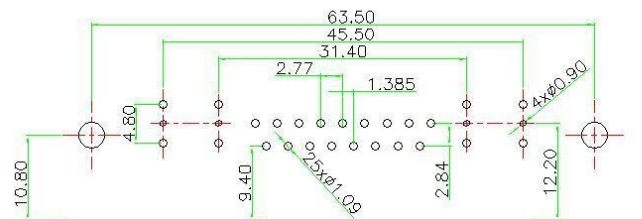
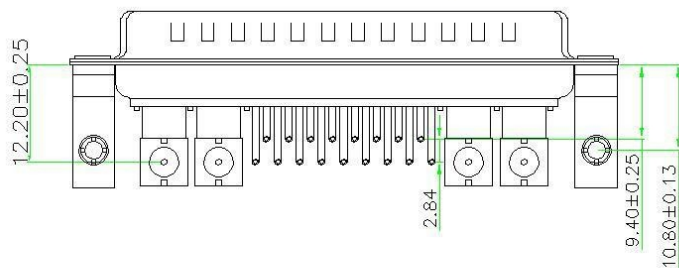



“*” Pivot Dimension

RoHS Component

PO(N)	1.6880mm(0.066)
5	50
7	75

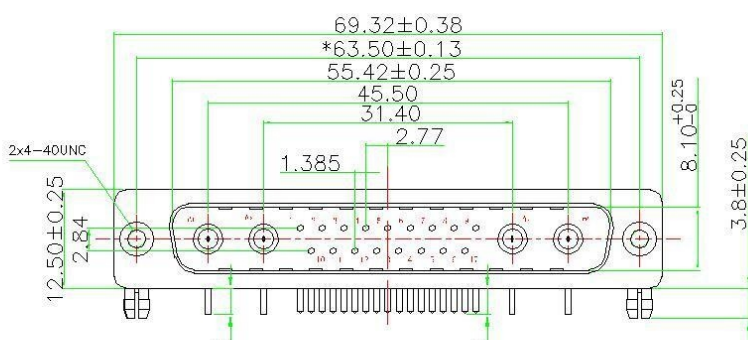

PCB LAYOUT

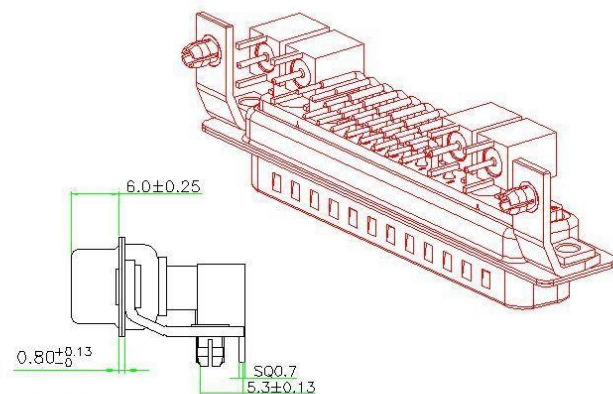

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
 HIGH FREQUENCY CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
 BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH FREQUENCY CONTACT CURRENT RATING: 50 OR 75 OHM.
 THE RADIO FREQUENCY RANGE: 0~3GHz.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING : 5.0 AMPS.
 THE WORKING VOLTAGE: 300V.
 HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
 TEMPERATURE RATING: -55° ~ +125° .



东莞市迅颢原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X° ±3° XX° ±1° UNIT: mm [inch] SCALE: 1:1 SIZE: A4	DRAWN BY : 杨冬梅	DATE : 2009.09.11	PART NAME: 21*1 公 射频弯板式 0.8 支架	
	CHECKED BY: 余飞仙	DATE : 2009.09.12	DRAW NO. PART NO.	XHY-05-3231 FR21WMMX1090000000000
APPROVED BY: 刘超		DATE : 2010.01.30	REMARK	
			MOLD NO.	