
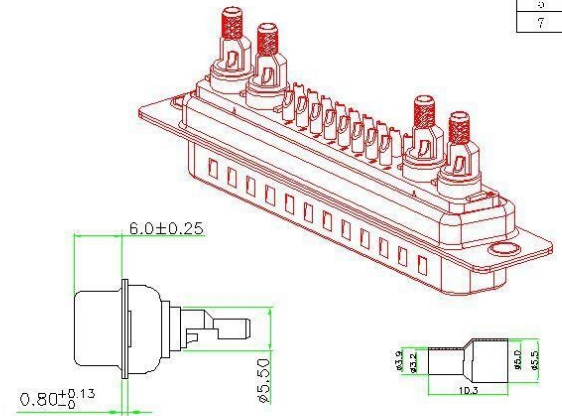
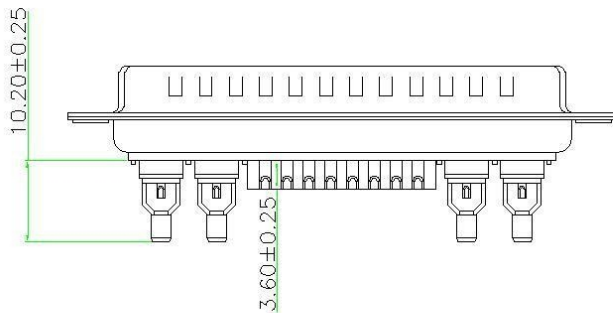


“*” Pivot Dimension

RoHS Component

PO(N)	PLACEMENT
5	50
7	75

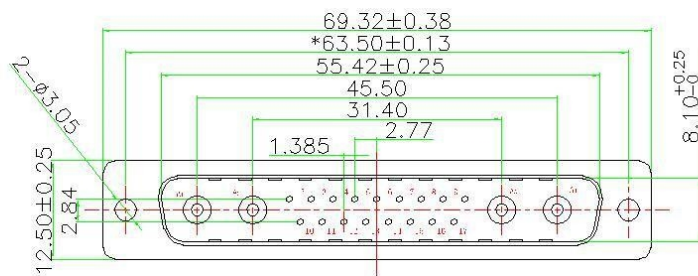

TUBE

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V 0 RATED.
HIGH FREQUENCY CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CURRENT RATING:50 OR 75 OHM.
THE RADIO FREQUENCY RANGE:0~3GHz.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH FREQUENCY CONTACT RESISTANCE:10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~-125° .



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X* ±3° X** ±1° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 杨冬梅	DATE : 2009.09.11	PART NAME: 21#4 公 射频频线式传统耦合	
	CHECKED BY: 余飞仙	DATE : 2009.09.12	DRAW NO. PART NO.	XHY-05-3205 FH21WMXH00000000000000
APPROVED BY: 刘超		DATE : 2010.01.30	REMARK	
			MOLD NO.	