
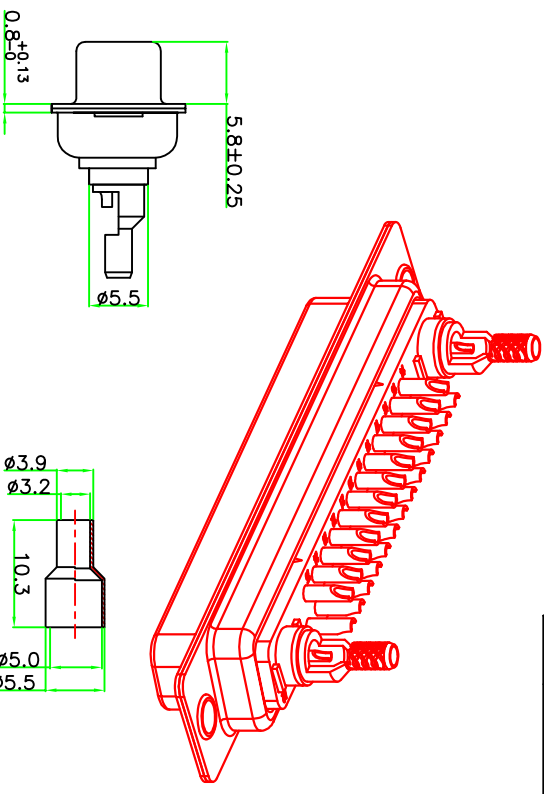
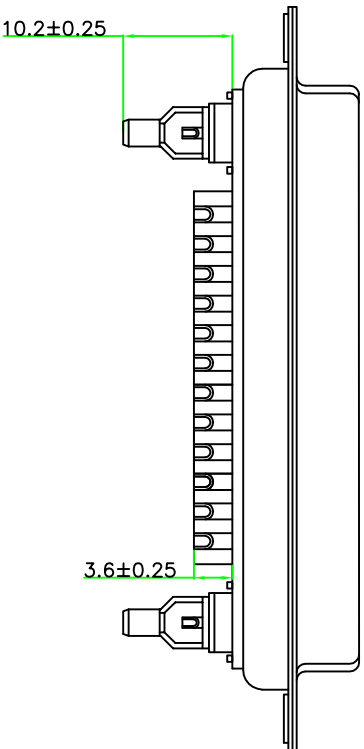


PO(X)		Characteristic Impedance (Ω)
5		50
7		75

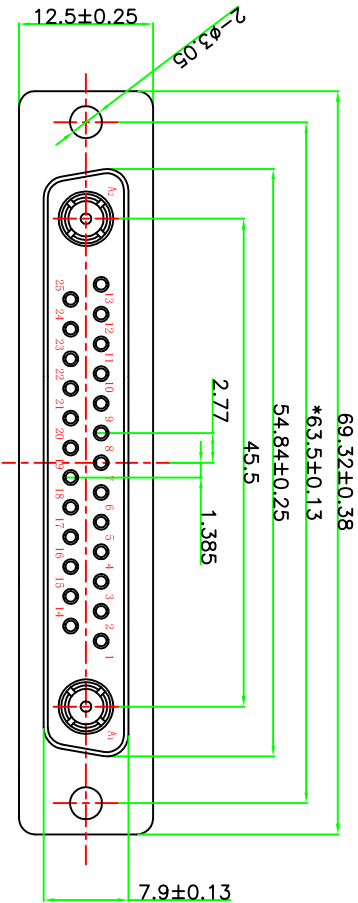

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE: 50 OR 75 OHM.
THE RADIO FREQUENCY RANGE: 0~3GHz.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING: 3.0 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~+125°.

		东莞市迅颢原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co., Ltd	
TOLERANCE: X. ±0.38 XX ±0.25 XXX ±0.13 X° ±3° XX° ±1°		DRAWN BY : 杨冬梅	DATE : 2009. 09. 11
		CHECKED BY: 余飞仙	DATE : 2009. 09. 12
UNNT: mm [inch]		APPROVED BY: 胡 建超	DATE : 2010. 01. 30
SCALE: 1:1 SIZE: A4		PART NO. 27W2 母 射频焊线式传统铆合	DRAW NO. XHY-05-3806
		PART NO. FB27W2FXH00000XXXX0000	REMARK
		MOLD NO.	