
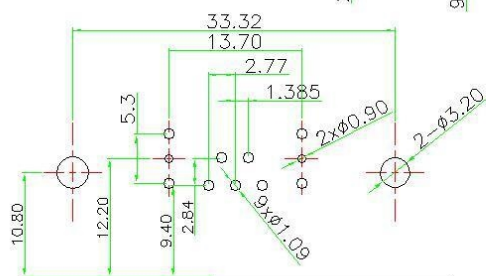
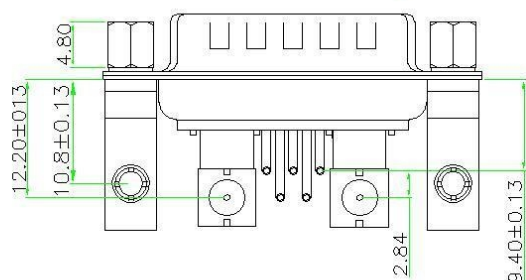
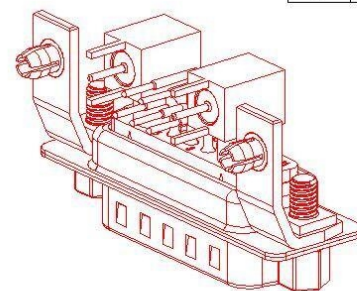
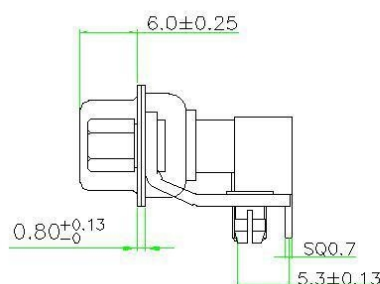


ROHS Component

PO (X)	EFFICIENCY (Y)
5	50
7	75

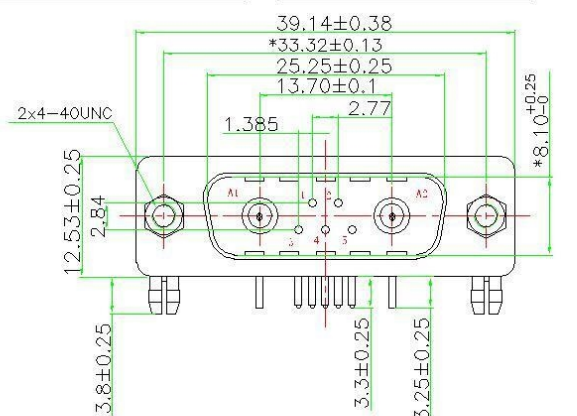

PCB LAYOUT

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, TYPICALLY 1/8" OR 3/16" FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
BRACKET SCREW: COPPER ALLOY MATERIAL, NICKEL PLATED.

ELECTRICAL CHARACTERISTICS

HIGH FREQUENCY CONTACT CURRENT RATING: 50 OR 75 OHM.
THE RADIO FREQUENCY RANGE: 0-30MHz.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING : 5.0 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIONMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGOHMS MIN.
TEMPERATURE RATING: 65° ± 125°.



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X .05		杨剑书	2010.05.15	792 公 斜柄两偏式卸10.8支顶	
XX .025				销4 40UNG4.8螺孔	
XXX .012					
XXX .05	XXX .05	CHECKED BY:	DATE :	PART NO.	XJY-05-1433
		侯应文	2010.05.15	MOLD NO.	FR072XMM1.000000000000
UNIT: mm [inch]		APPROVED BY:	DATE :	REMARK	
SCALE:1:1 SIZE: A4		胡超	2010.05.15	DRAW NO.	