
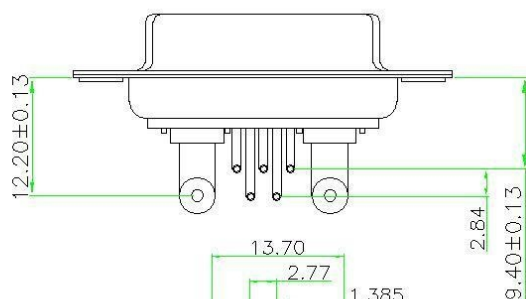




“*” Pivot Dimension

ROHS Component

PO(XX)	电流额定值	ΦA	PCB ΦB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

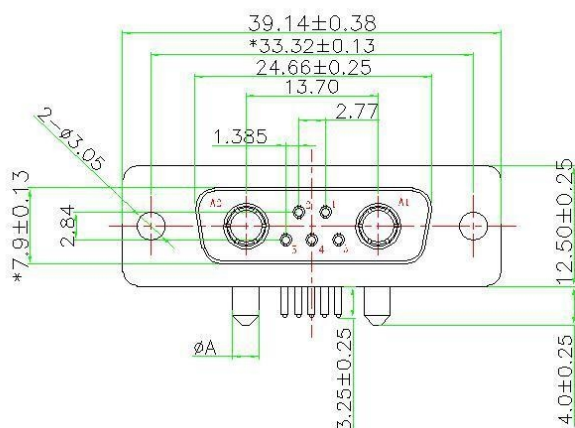

PCB LAYOUT

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,TIN PL OR Au FINISHED.
 CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 91V 0 RATED.
 HIGH POWER CONTACT :COPPER ALLOY MATERIAL,GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING:10,20,30 OR 10 AMPS.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
 THE WORKING VOLTAGE:300V.
 HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING: 55° ~ 125° .



东莞市迅源原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: L 0.2 AA 0.15 AAA 0.12 A 0.1 2" A 0.1 2"	DRAWN BY :	DATE :	PART NAME:	
	杨剑书	2010.05.15	792 母 电汽两插板式传输插座	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	XUY-05-1412
	侯应文	2010.05.15	MOLD NO.	PROT#2FAD000000000000
	APPROVED BY:	DATE :	REMARK	
	胡超	2010.05.15	DRAW NO.	