
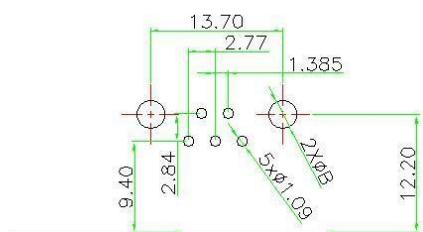
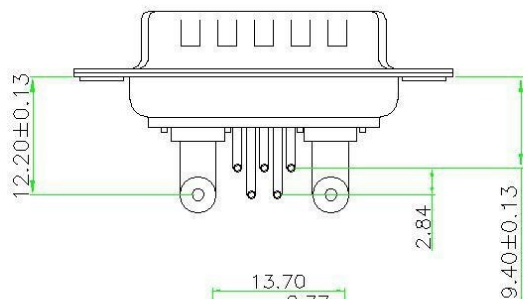




“*” Pivot Dimension

ROHS Component

PO(XX)	电流额定值(A)	ΦA	PCB ΦB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

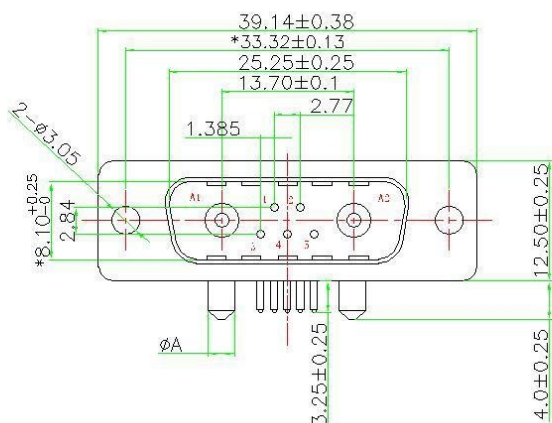

PCB LAYOUT

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, TIN PLATED OR GOLD FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
 HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 THE WORKING VOLTAGE: 300V.
 HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGOHMS MIN.
 TEMPERATURE RATING: 55° ~ 125°.



东莞市迅源原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: A ±0.2 AA ±0.15 AAA ±0.1 A* ±0.1 A* ±0.1	DRAWN BY:	DATE:	PART NAME:	
	杨剑书	2010.05.15	792 公 电 流 两 端 板 式 传 输 插 头	
	CHECKED BY:	DATE:	PART NO.	XHY-05-1411
	侯应文	2010.05.15	MOLD NO.	PROT2MX1000000000000
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY:	DATE:	REMARK	
	胡超	2010.05.15	DRAW NO.	