
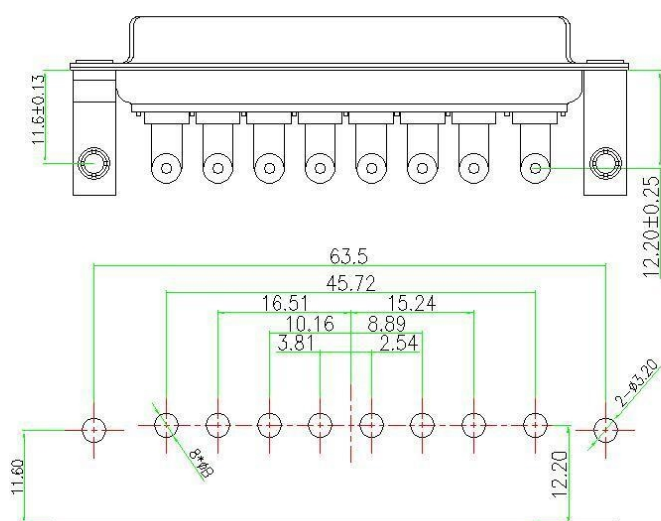
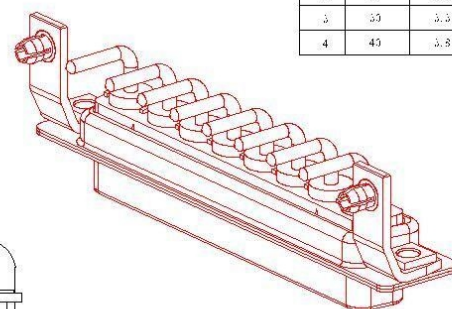


ROHS Component

1000	电流/毫安	mA	PCB 尺寸
1	10	1.7	2.3
2	20	2.75	3.0
3	30	3.3	3.5
4	40	3.8	4.10



PCB LAYOUT

SNELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni or Au FINISHED.
 CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V 0 RATED.
 HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
 BRACKET: COPPER ALLOY MATERIAL, NI PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
 THE WORKING VOLTAGE:300V.
 HIGH POWER CONTACT RESISTANCE:10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING: 55" "125" .



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY: 杨剑书		DATE: 2010.05.15		PART NAME: 8档 母 电液导液式阀11.6支装	
1/16		CHECKED BY: 侯应文		DATE: 2010.05.15		PART NO. XHY-05-1611	
1/32				MOLD NO.		PRO878FH040000000000	
1/64				APPROVED BY:		DATE: 2010.05.15	
UNIT: mm [inch]		SCALE: 1:1		SIZE: A4		DRAW NO.	