
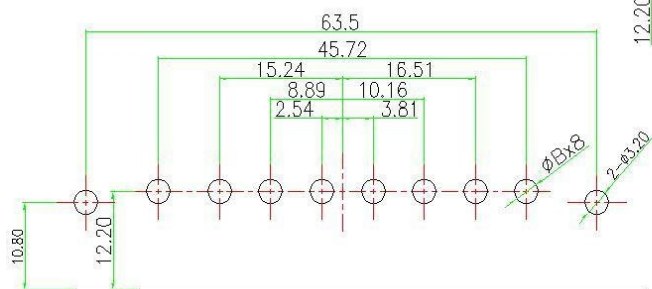
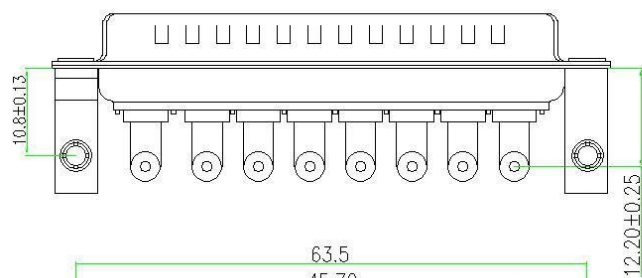
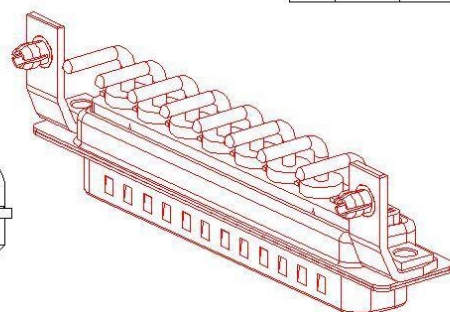



“*” Pivot Dimension

ROHS Component

序号	电气符号	单位	PCB-B
1	13	1.7	2.3
2	20	2.75	3.3
3	30	3.3	3.5
4	40	3.8	4.13

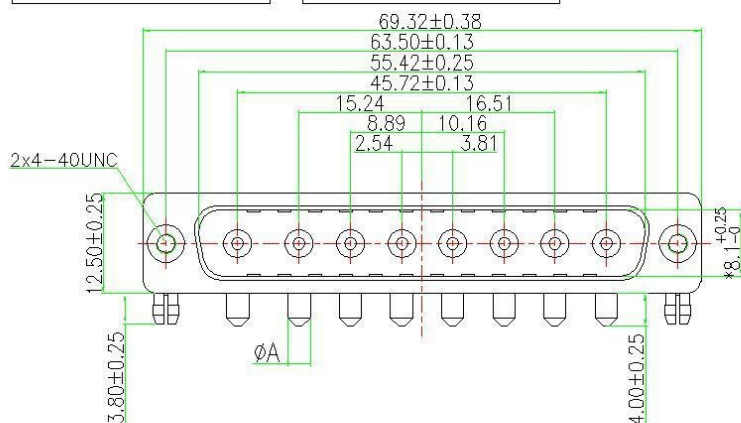

PCB LAYOUT

MATERIALS AND FINISH


SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
 HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
 BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 10 AMPS.
 THE WORKING VOLTAGE: 300V.
 HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
 TEMPERATURE RATING: 55° ~ 125°.



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: A ±0.25 AA ±0.20 AM ±0.12 AN ±0.10	DRAWN BY: 杨剑书 DATE: 2010.05.15	PART NAME: 8PIN 公 孔 源等速板式脚10.8支型
CHECKED BY: 侯应文 DATE: 2010.05.15	PART NO. XHY-05-1608	MOLD NO. PROS783X1090000000000
APPROVED BY: 胡超 DATE: 2010.05.15	REMARK	DRAW NO.



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4