

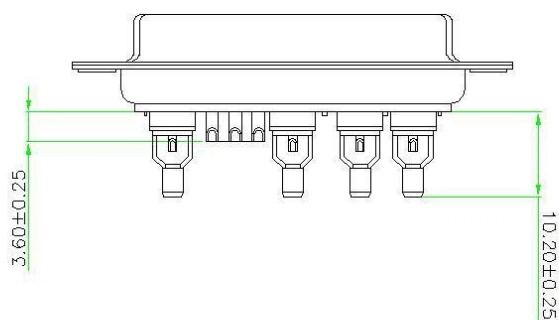
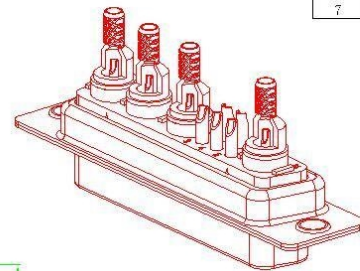



“*” Pivot Dimension

ROHS Component

PO(X)	2. PRETESTING(2)
5	50
7	75

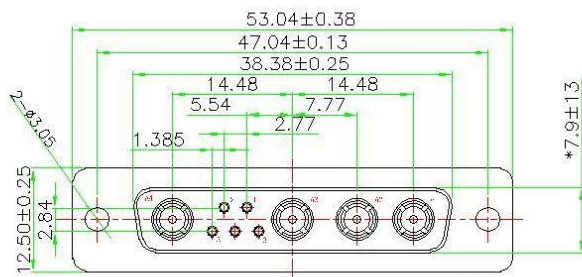

TUBE

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
 HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH FREQUENCY CONTACT CURRENT RATING: 50 OR 75 OHM.
 THE RADIO FREQUENCY RANGE: 0~3GHz.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 THE WORKING VOLTAGE: 300V.
 HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGOHMS MIN.
 TEMPERATURE RATING: -55° ~ +125°.



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: L +0.38 $L \times$ +0.25 $L \div$ +0.13 L° 1.5° $L \div$ 2°	DRAWN BY:	DATE:	PART NAME:	
	杨剑玉	2010.05.15	9*4 母 射频焊线式传统组合	
 UNIT: mm [inch]	CHECKED BY:	DATE:	PART NO.	XHY-05-1810
	侯应文	2010.05.15	MOLD NO.	17B09W41/X10000000000000
SCALE: 1:1 SIZE: A4	APPROVED BY:	DATE:	REMARK	
	胡超	2010.05.15	DRAW NO.	