
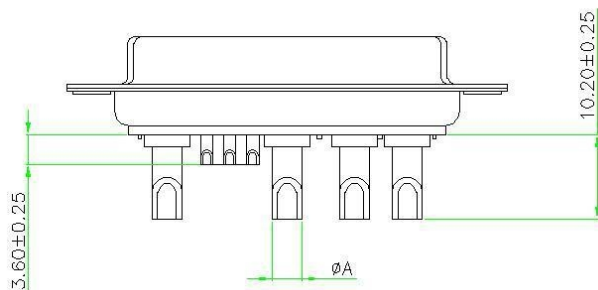
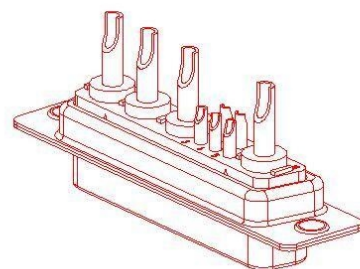



“*” Pivot Dimension

ROHS Component

PO(X)	A	B	#136	CLASSIFICATION
1	2.5	4.5	10x16#	10
2	3.6	5.0	10x16#	20
3	4.4	5.5	8x16#	30
4	5.5	5.5	6x16#	40

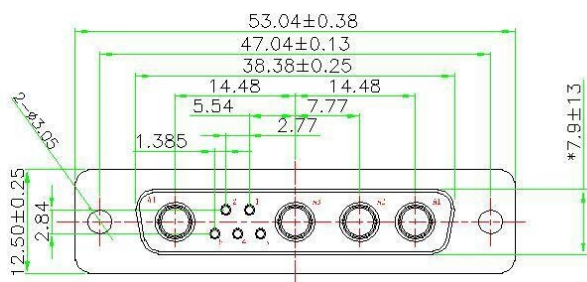

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V-0 RATED.
 HIGH POWER CONTACT :COPPER ALLOY MATERIAL,GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING:10,20,30 OR 40 AMPS.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
 THE WORKING VOLTAGE:300V.
 HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING: 55° ~125° .



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: $\begin{matrix} L & +0.38 \\ \Delta X & +0.25 \\ L, \Delta X & +0.13 \\ L, \Delta X & L, \Delta X \end{matrix}$	DRAWN BY :	DATE :	PART NAME:	
	杨剑玉	2010.05.15	9#4 母 电流焊线式传统铜合	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	XHY-05-1802
	侯应文	2010.05.15	MOLD NO.	PB09W4FX1100000000000000
APPROVED BY:		DATE :	REMARK	
胡超		2010.05.15	DRAW NO.	