

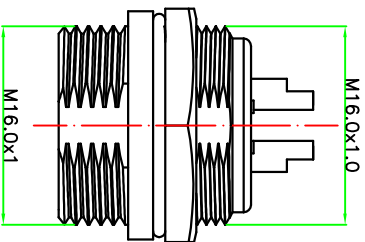
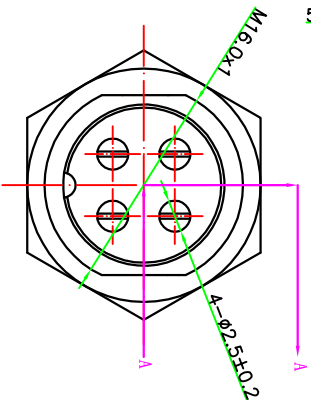
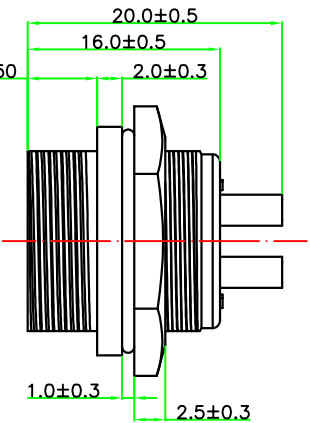


“*” Pivot Dimension


RoHS Component

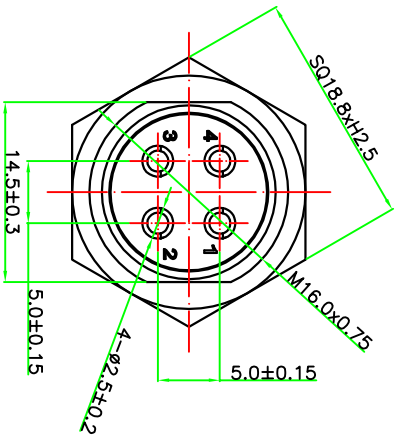

SECTION A-A

MATERIALS AND FINISH
SHELL: ZINC ALLOY MATERIAL, Ni FINISHED.
CONNECTOR INSULATOR: Bakelite BLACK.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, Silvery FINISHED.
NUT: COPPER ALLOY MATERIAL, Ni FINISHED.

ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10AMPS.
THE WORKING VOLTAGE: 500V.
HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1500 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -40° ~+85° .

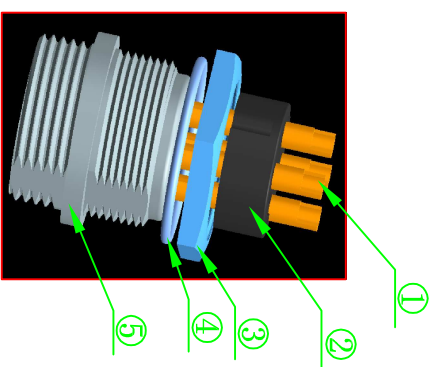

⑤	胶 芯	电木
④	垫 圈	铁/镀镍
③	六角螺母	铜合金/镀镍
②	主 体	锌合金/镀镍
①	插 针	铜合金/镀银
系号	名 称	材 质
东莞市迅颖原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co.,Ltd		
TOLERANCE: XX ±1.0 XXX ±0.5 XXX ±0.2 X' ±5° X'Y' ±2°		
DRAWN BY : 杨剑玉 CHECKED BY : 杨剑玉 APPROVED BY : 胡超		
DATE : 2016. 03. 10 DATE : 2016. 03. 10 DATE : 2016. 03. 10		
PART NAME: M16圆形电连接器 4P 公座		
DRAW NO. XHY-05-501-NO1		
PART NO. 1128-1041AJD-25-501001		
REMARK		
MOLD NO.		
UNIT: mm [inch] SCALE:1:1 SIZE: A4		