
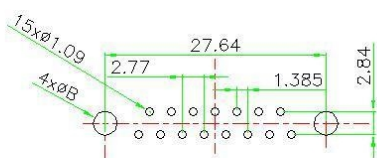
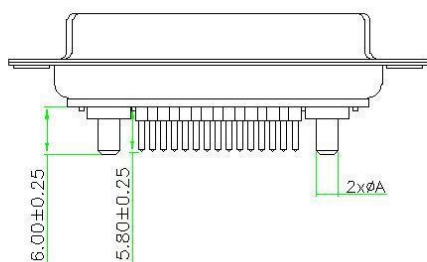




“*” Pivot Dimension

Rolls Component

FOOT	电接触面积	2A	PCB 2B
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
1	10	3.8	1.10

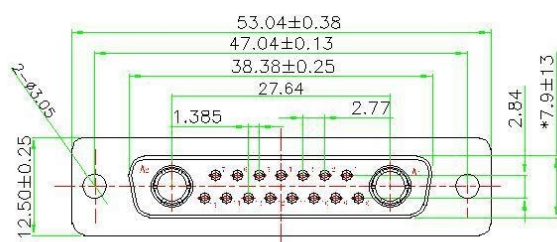

PCB LAYOUT

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin NI OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V-0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 10 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .



东莞市迅颖原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X* ±3° X' ±1° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:	
	杨冬梅	2009.09.11	17*2 母 电插式板式传统耦合	
	CHECKED BY:	DATE :	DRAW NO.	XHY-09-2608
	余飞仙	2009.09.12	PART NO.	PS17*2FXH000000000000
APPROVED BY:		DATE :	REMARK	
蔡 斌		2010.01.30	MOLD NO.	