
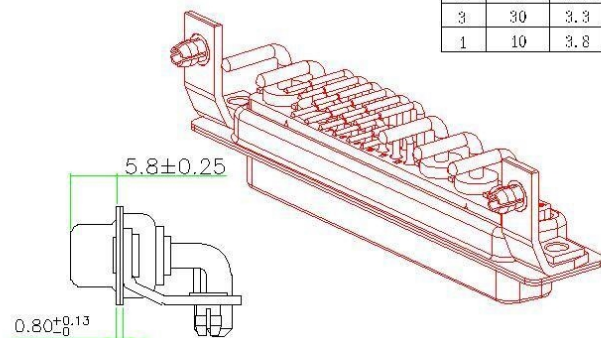
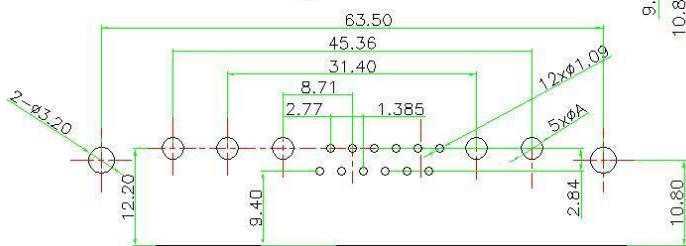
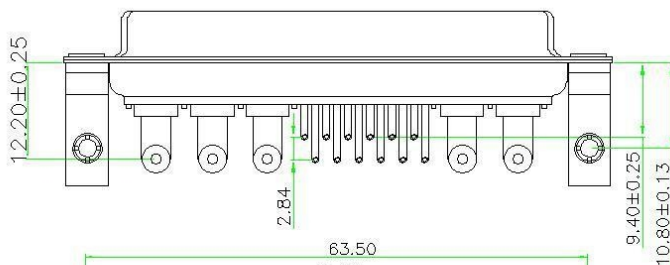


"*" Pivot Dimension

Rolls Component

FOC	电芯数量	ΦA	PCB ΦB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
1	10	3.8	1.10

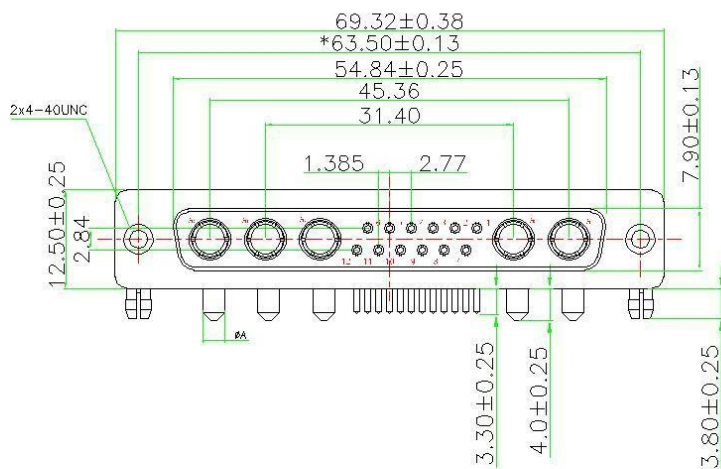

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V-0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .



东莞市迅源原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X* ±3° X' ±1° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 杨冬梅	DATE : 2009.09.11	PART NAME: 17*5 母 电源等极板式插10.8支架	
	CHECKED BY: 余飞仙	DATE : 2009.09.12	DRAW NO. PART NO.	XHY-09-2824 PR17*5FXH090000000000
APPROVED BY: 蔡建		DATE : 2010.01.30	REMARK	
			MOLD NO.	