
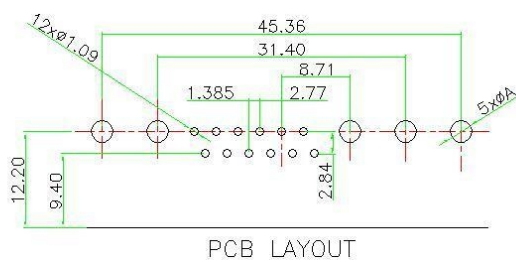
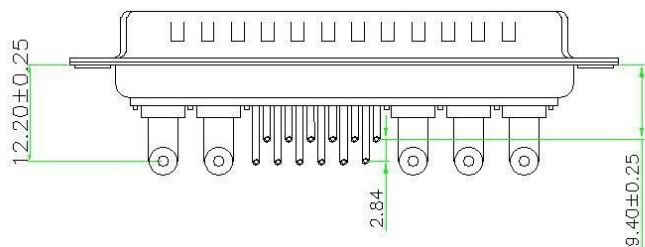



“*” Pivot Dimension

Rolls Component

FOOT	电连接器	ΦA	PCB ΦB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
1	10	3.8	1.10

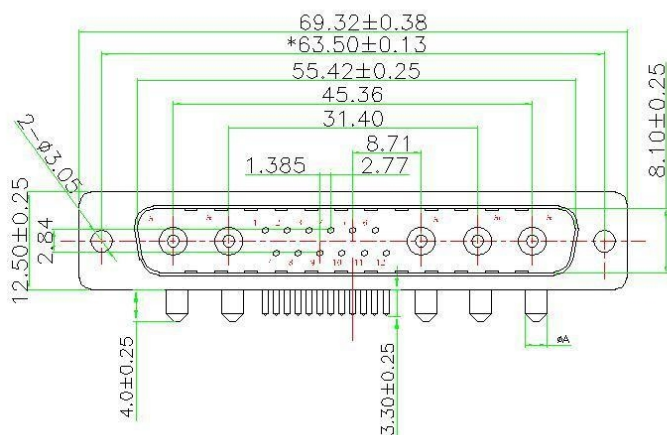

PCB LAYOUT

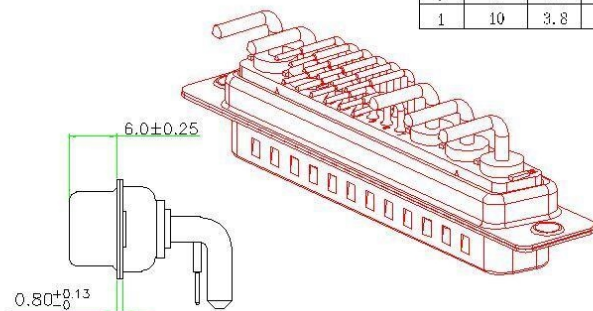

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL,TIN NI OR Au FINISHED.
 CONNECTOR INSULATOR:PBT THERMOPLASTIC,30% GLASS FILLED,UL 94V-0 RATED.
 HIGH POWER CONTACT :COPPER ALLOY MATERIAL,GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
 ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING:10,20,30 OR 10 AMPS.
 CONNECTOR WITH SIGNAL CONTACT CURRENT RATING :5.0 AMPS.
 THE WORKING VOLTAGE:300V.
 HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE:2000 MEGAOHMS MIN.
 TEMPERATURE RATING:-55° ~+125° .



东莞市迅源原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.38 XX ±0.25 XXX ±0.13 X° ±3° X'° ±1° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:	
	杨冬梅	2009.09.11	17*5 公 电连接器板式传统耦合	
	CHECKED BY:	DATE :	DRAW NO.	XHY-09-2811
	余飞仙	2009.09.12	PART NO.	PR17*5MXH00000000000000
	APPROVED BY:	DATE :	REMARK	
	蔡 斌	2010.01.30	MOLD NO.	