

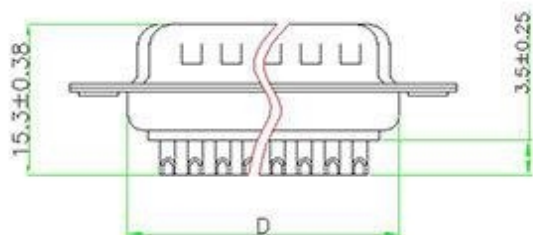


RoHS Component

"*" Pivot Dimension

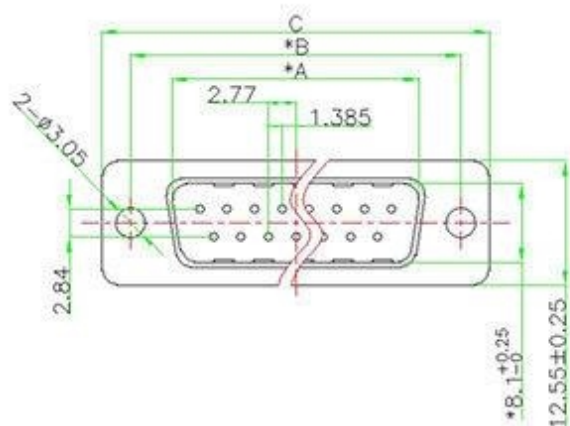

NOTICE :

1. ELECTRICAL:

DIELECTRIC RATING: 300V
CONTACT CURRENT RATING: 3AMP
CONTACT RESISTANCE: 15mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC
DIELECTRIC STRENGTH: 500V AC RMS for 1Minute
OPERATION TEMPERATURE: -55℃ ~125℃

2. MATERIAL:

INSULATOR: PBT+30% G.F(UL94V-0)
CONTACT: COPPER ALLOY
CONTACT PLATED: GOLD FLASH OVER NICKEL
SHELL: SPC
SHELL PLATED: NICKEL/TIN



东莞市迅源原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: XX ±0.30 XXX ±0.25 XXXX ±0.15 X' ±0' X" ±0"	DRAWN BY: 杨冬梅 CHECKED BY: 杨冬梅 APPROVED BY: 胡超	DATE: 2009.08.23 DATE: 2009.08.23 DATE: 2009.08.23	PART NAME: 16 Pin 公 母线式连接器 DRAW NO. MS-05-0001 PART NO. 11033330000000000000 REMARK: MOLD NO.
--	---	--	---

UNIT: mm [inch]
SCALE: 1:1 SIZE: A4