
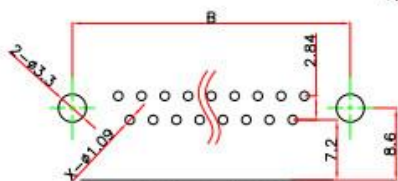
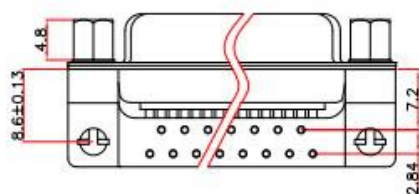



RoHS Component

“*” Pivot Dimension

PO(XXX)	A ±0.25	B ±0.13	C ±0.36	D ±0.25
009	16.33	24.09	36.51	19.28
015	24.06	33.32	36.14	27.51
025	36.38	47.04	53.04	41.28
037	54.84	63.56	66.32	57.71

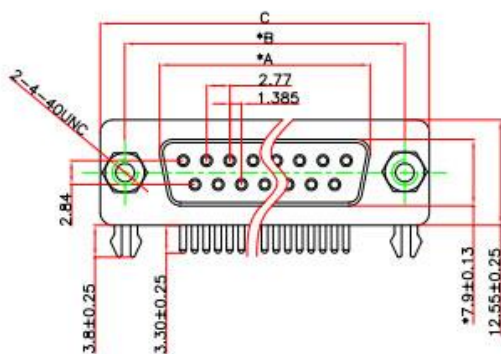

PCB LAYOUT

NOTICE :

1. ELECTRICE:

DIELECTRIC RATING: 300V
 CONTACT CURRENT RATING: 5AMP
 CONTACT RESISTANCE: 15mΩ MAX.
 INSULATION RESISTANCE: 1000MΩ MIN.at 500V DC
 DIELECTRIC STRENGTH: 500V AC RMS for 1Minute
 OPERATION TEMPERATURE: -55C° ~125C°

2. MATERIAL:

INSULATOR: PBT+30% G.F(UL94V-0)
 CONTACT: COPPER ALLOY
 CONTACT PLATED:GOLD FIASH OVER NICKEL
 SHELL: SPCC
 SHELLPLATED:NICKEL/TIN
 BRACKET:PBT+30% G.F(UL94V-0)



东莞市迅源原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:	DRAWN BY :	DATE :	PART NAME:
XX ±0.25	杨冬梅	2009.08.22	09-08-0022
XXX ±0.25	CHECKED BY:	DATE :	DRAW NO.:
XX ±0.13	杨冬梅	2009.08.22	PORXXXPH16000090000072
XX ±0.13	APPROVED BY:	DATE :	REMARK
XX ±0.13	胡超	2009.08.22	MOLD NO.

UNIT: mm [inch]

SCALE:1:1 SIZE: A4