
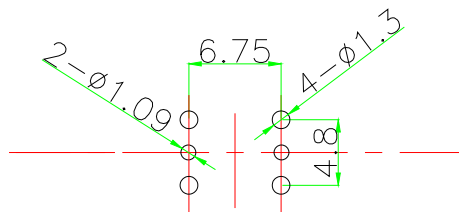
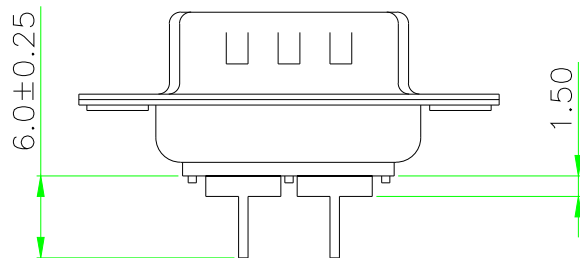
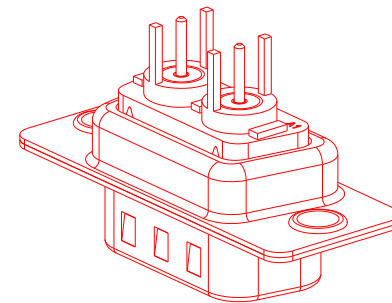
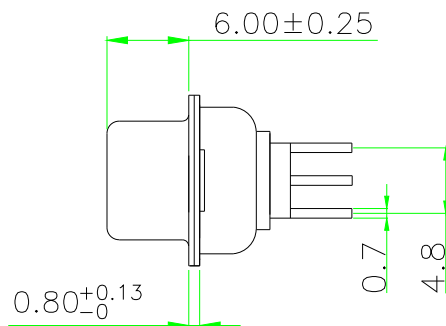


“*” Pivot Dimension

ROHS Component

PO(X)	CURRENT RATING (Ω)
5	50
7	75

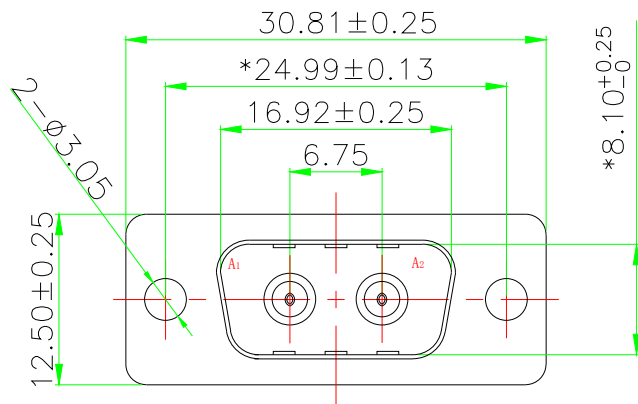

PCB LAYOUT

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.

ELECTRICAL CHARACTERISTICS

HIGH FREQUENCY CONTACT CURRENT RATING: 50 OR 75 OHM.
THE RADIO FREQUENCY RANGE: 0~3GHz.
THE WORKING VOLTAGE: 300V.
HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125°.



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: X. ±0.38 X.X ±0.25 X.XX ±0.13 X.* ±5° X.X* ±2°	DRAWN BY : 杨剑玉	DATE : 2010. 05. 15	PART NAME: 2W2 公 射频直焊板式传统铆合	
	CHECKED BY: 侯应文	DATE : 2010. 05. 15	PART NO. XHY-05-0417	MOLD NO. FS02W2MX. 0000000000000
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 胡超	DATE : 2010. 05. 15	REMARK	
			DRAW NO.	