
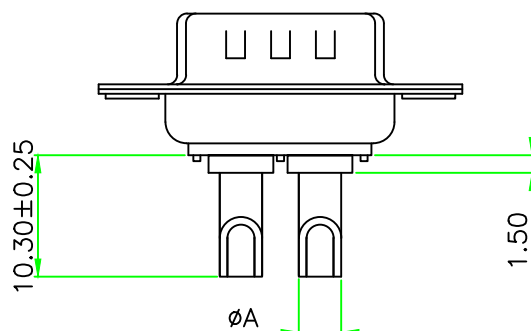




“*” Pivot Dimension

ROHS Component

P0(X)	A	B	WIRE	CURRENT RATING (A)
1	2.5	4.5	14#~16#	10
2	3.6	5.0	10#~12#	20
3	4.4	5.5	8#~10#	30
4	5.5	5.5	6#~8#	40

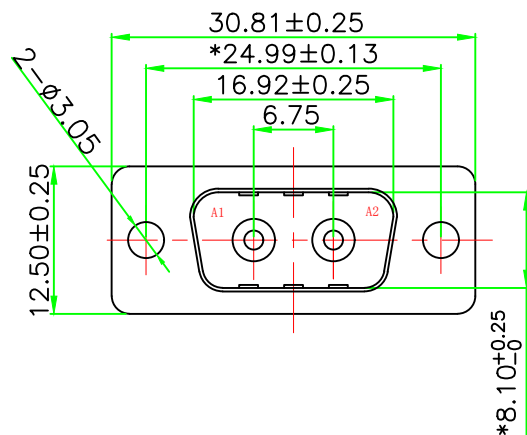

MATERIALS AND FINISH

TERMINALS: COPPER ALLOY, ELECTROPLATED NICKEL BASE, 1U"-30U" GOLD PLATING IN CONTACT AREA, TINNED OR TIN-LEAD OR GOLD PLATING IN WELDING AREA, THE MATERIAL USED FOR THE HIGH CURRENT TERMINAL IS PHOSPHORUS COPPER, MALE BRASS; 5A SMALL TERMINAL MATERIAL FEMALE END (CROWN SPRING), MALE END IS BRASS. CLAMP RING: THE MATERIAL USED IS C17200.

THE RUBBER CORE OF RF COAXIAL TERMINAL IS MADE OF TEFLON MATERIAL.

OTHER: RIVET: BRASS, NICKEL-PLATED TIN PLATING OR ON REQUEST;

FORK: BRASS, TINNED/TINNED LEAD/NICKEL TINNED OR AVAILABLE ON REQUEST;

SCREW: BRASS, NICKEL-PLATED TIN ON REQUEST;

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.

CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGH POWER CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.

THE WORKING VOLTAGE: 300V.

CONTACT IMPEDANCE: SIGNAL TERMINALS: ALL 10MΩ MAX; CURRENT TERMINALS: 2.7MΩ MAX;

DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.

INSULATION RESISTANCE: 2000 MEGAΩ MIN.

TEMPERATURE RATING: -55° ~ +125°.

RF TERMINAL CHARACTERISTIC IMPEDANCE: 50Ω ± 5Ω; 75Ω ± 5Ω

WITHSTAND VOLTAGE OF THE RF TERMINAL: 750V AC RMS (STANDARD DEVIATION). AT 1 MINUTE

RF TERMINAL CONTACT IMPEDANCE: 30Ω MAX

RATED VOLTAGE OF THE RF TERMINAL: 250V AC



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE: X. ±0.38 X.X ±0.25 X.XX ±0.13 X.* ±5° X.X* ±2°	DRAWN BY :	DATE :	PART NAME:	
	杨剑玉	2010. 05. 15	2W2 公 电流焊线式传统铆合	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	XHY-05-0401
	侯应文	2010. 05. 15	MOLD NO.	PB02W2MX. 0000000000000
	APPROVED BY:	DATE :	REMARK	
	胡超	2010. 05. 15	DRAW NO.	