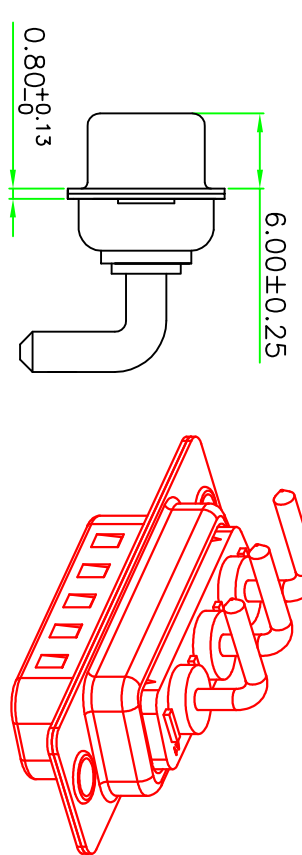
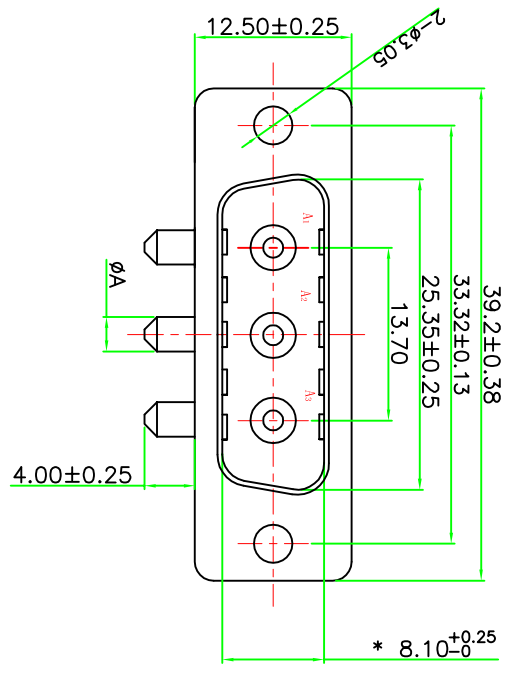


MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉	2010. 05. 15	3W3 公	电流弯焊板式传统聊合		
X.X	±0.25						
X.XX	±0.13						
X.° ±5°	X.X° ±2°						
UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	XHY-05-0803		
SCALE:1:1		胡超	2010. 05. 15	MOLD NO.	PRO3W3MHH00000XXXXX0000		
		APPROVED BY:	DATE :	REMARK			
		胡超	2010. 05. 15	DRAW NO.			