
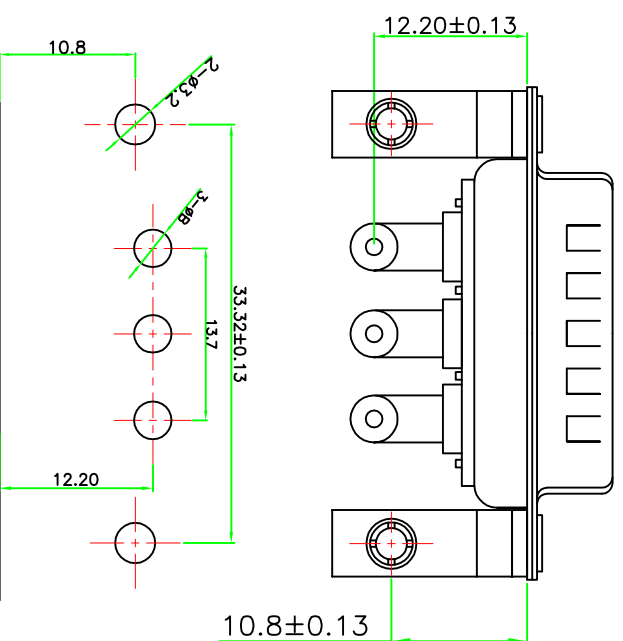
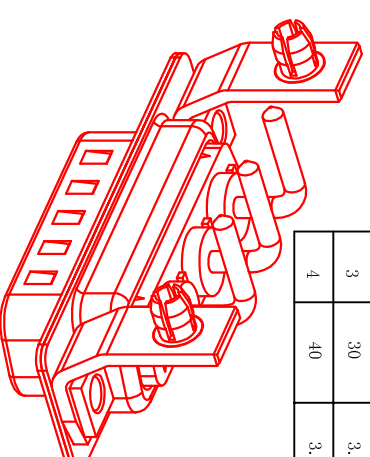
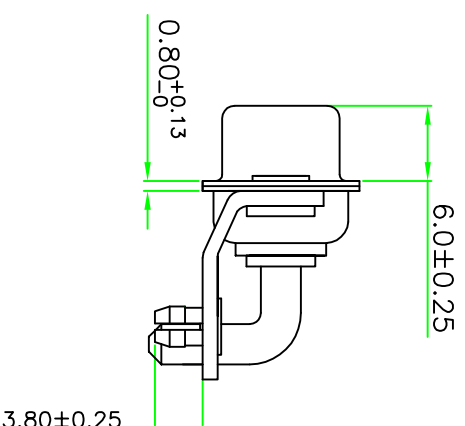


“*” Pivot Dimension

ROHS Component

POX	电流强度(A)	ΦA	PCB ΦB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10

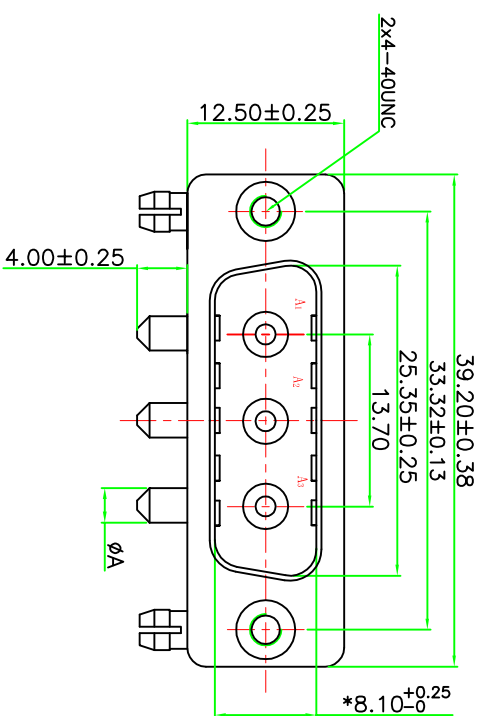

PCB LAYOUT



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:

X.	± 0.38
X.X	± 0.25
X.XX	± 0.13
X. $\pm 5^\circ$	X.X $^\circ \pm 2$

DRAWN BY :	DATE :
------------	--------

PART NAME:

CHECKED BY:	DATE :
-------------	--------

PART NO.	XHY-05-0825
----------	-------------

侯应文	2010.05.15
-----	------------

	PRO3W3MXH090000XXXX0000
MOLD NO.	

UNIT: mm [inch]

APPROVED BY: DATE :

REMARK	
--------	--

SCALE:1:1	SIZE: A
-----------	---------

胡超	2010.05.15
----	------------

DRAW NO.	

MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Ti/Ni OR Au FINISHED.

CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGHT POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.

BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.

THE WORKING VOLTAGE: 300V.

HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE: 2000 MEGAOHMS MIN.

TEMPERATURE RATING: -55° ~ $+125^{\circ}$