

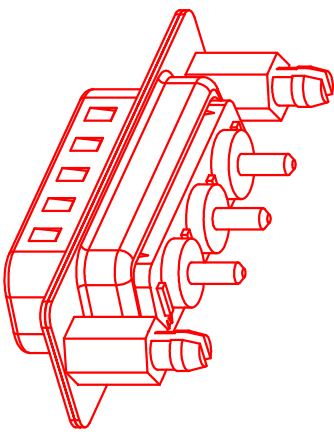


PO(N)	电流强度(A)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.05
3	30	3.3	3.6
4	40	3.8	4.10

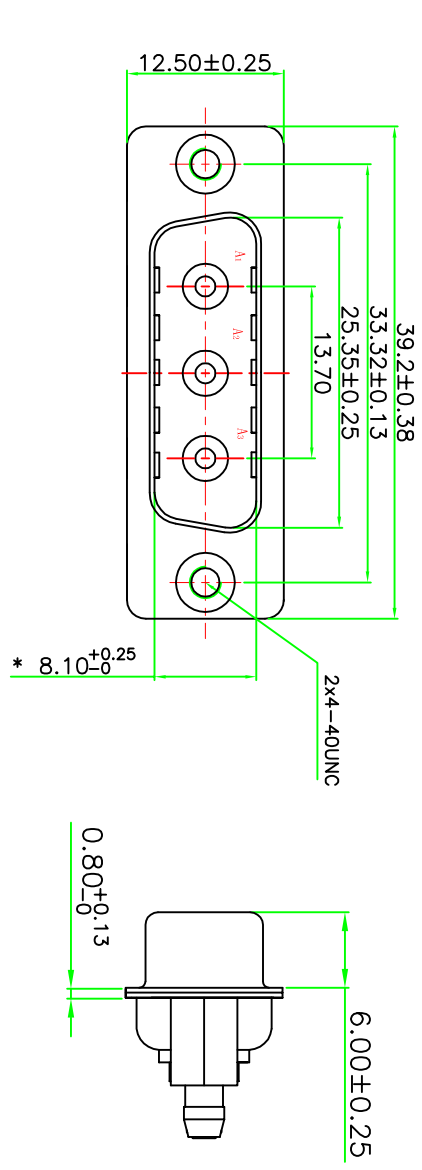

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
FORK:COPPER ALLOY MATERIAL, Ni PLATED.

ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:10 MILLIOMHS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

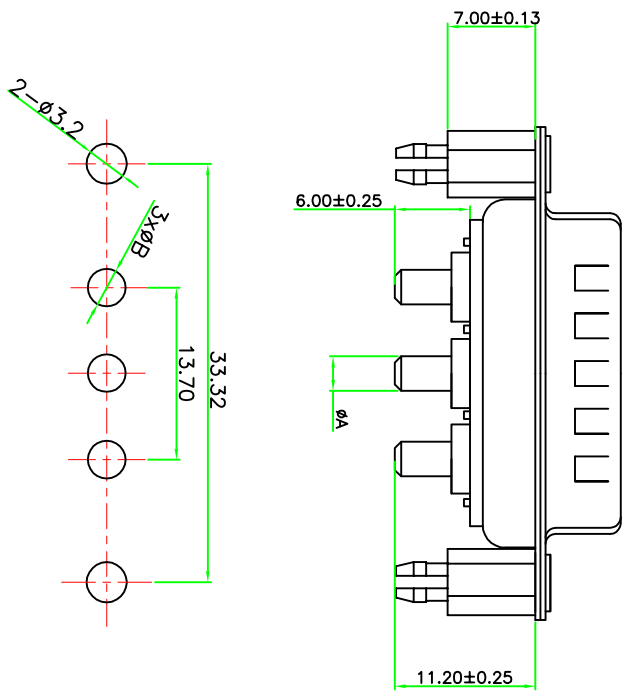

PCB LAYOUT

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWED BY :		DATE :		PART NAME:	
X. ±0.38		杨剑玉		2010. 05. 15		3W3 公 电流直焊板式铆7.0鱼叉	
X.X ±0.25		CHECKED BY:		DATE :		PART NO.	
X.XX ±0.13		侯应文		2010. 05. 15		PS03W3MNH31000XXXXX0000	
X° ±5° X'Y° ±2°		APPROVED BY:		DATE :		REMARK	
UNIT: mm [inch]		胡超		2010. 05. 15			
SCALE:1:1		SIZE: A4				DRAW NO.	