
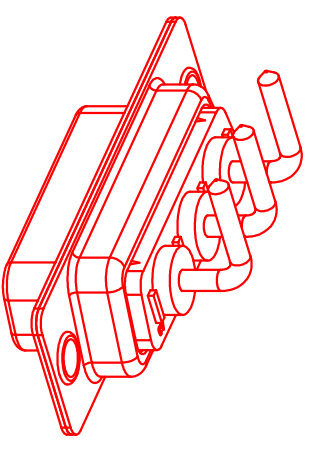
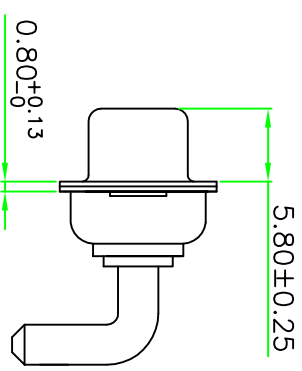


MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

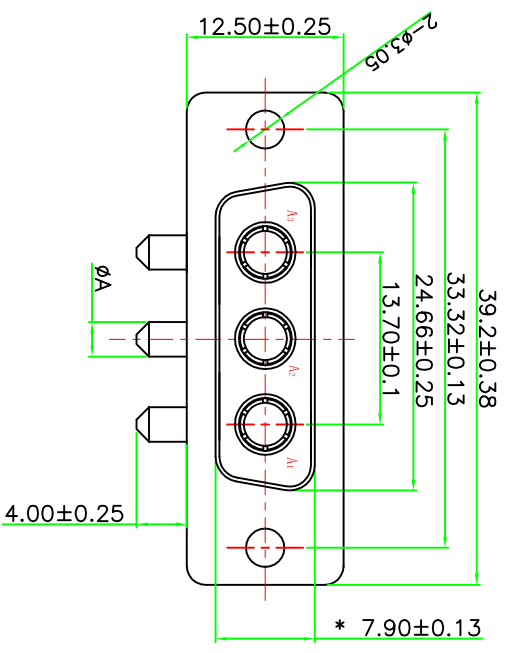

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X	±0.38	杨剑玉	2010. 05. 15	3W3 母 电流弯焊板式传统铆合	
X.X	±0.25	CHECKED BY: 侯应文	DATE : 2010. 05. 15	PART NO.	XHV-05-0804
X.XX	±0.13			MOLD NO.	PRO3W3FHXH000000XXXXX0000
X ° ±5°	X X° ±2°	APPROVED BY: 胡超	DATE : 2010. 05. 15	REMARK	
UNIT: mm [inch]	SCALE:1:1	SIZE: A4	DRAW NO.		

PCB LAYOUT