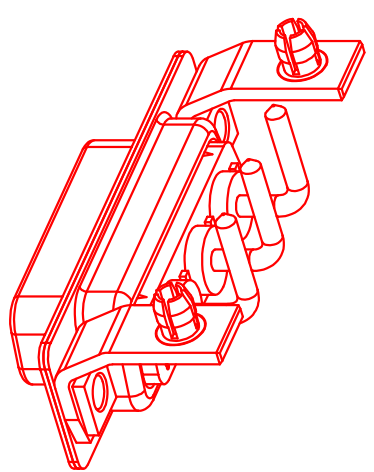
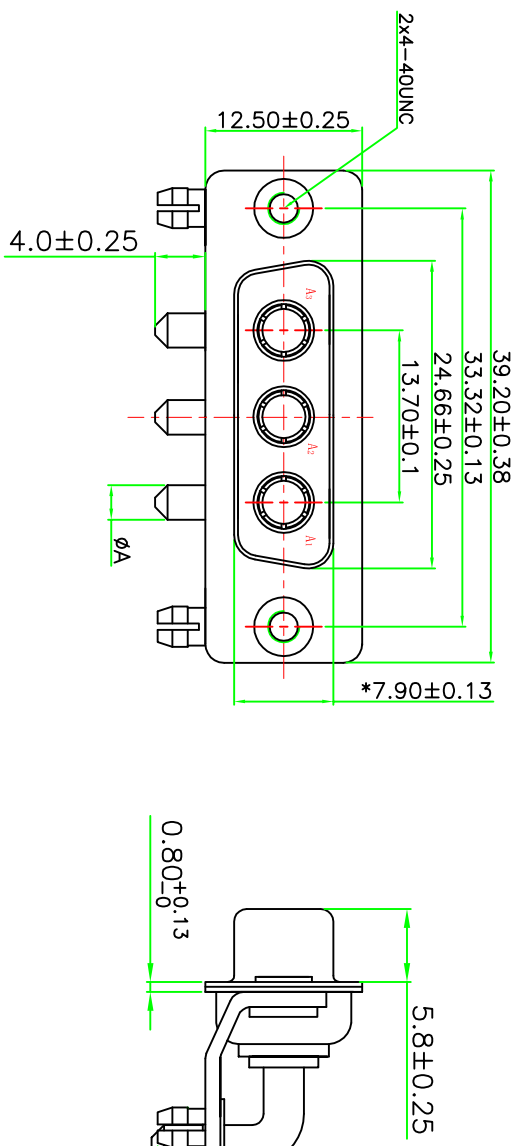


PCB LAYOUT

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
BRACKET: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125° .

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co., Ltd

TOOLERANCE: X. ±0.38 X.X ±0.25 X.XX ±0.13 X° ±5° X'X' ±2°		DRAWN BY : 杨剑玉 DATE : 2010.05.15	PART NAME: 3W3 母 电流弯焊板式铆10.8支架
	CHECKED BY: 侯应文 DATE : 2010.05.15	PART NO. XHY-05-0826	
	APPROVED BY: 胡超 DATE : 2010.05.15	MOLD NO. PR03W3FHYH09000XXXX0000	
SCALE: 1:1	SIZE: A4	REMARK	