

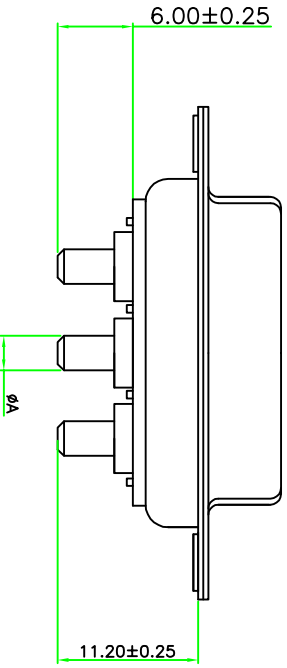
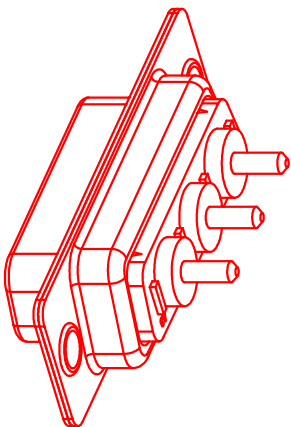



PO(N)	电流强度(A)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.05
3	30	3.3	3.6
4	40	3.8	4.10

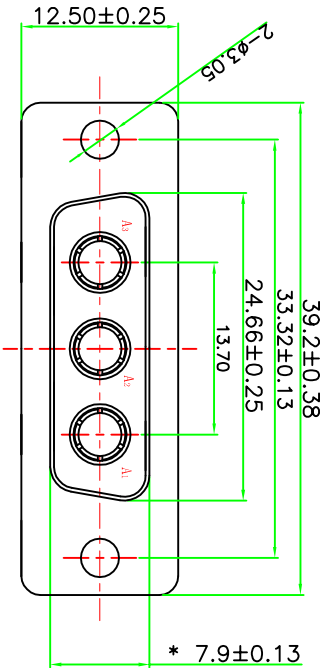

PCB LAYOUT

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED,
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTECT RESISTANCE:10 MILLIOMHS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X. ±0.38 X.X ±0.25 X.XX ±0.13 X° ±5° X'X' ±2°		DRAWN BY : 杨剑玉	DATE : 2010. 05. 15	PART NAME: 3W3 母 电流直焊板式传统耦合	
CHECKED BY: 侯应文		DATE : 2010. 05. 15	PART NO. XHY-05-0810		
APPROVED BY: 胡超		DATE : 2010. 05. 15	MOLD NO. PS03W3FXH000000XXXXX0000		
REMARK					

UNIT: mm [inch]
SCALE:1:1 SIZE: A4