
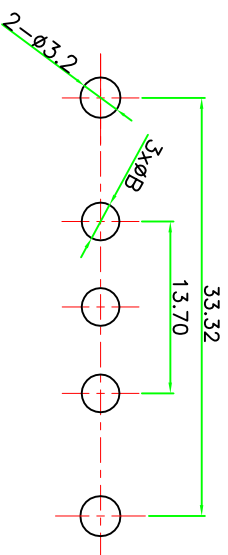
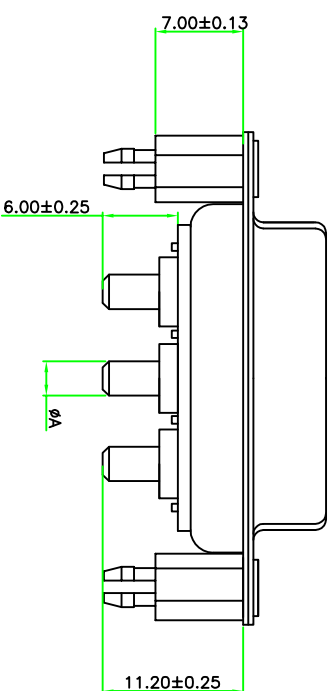
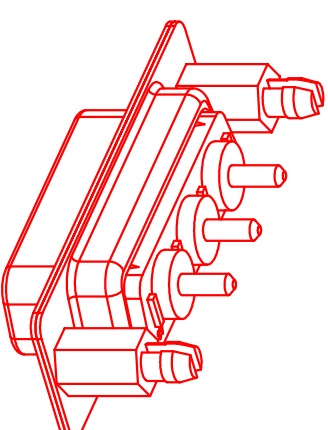


“\*” Pivot Dimension

ROHS Component

| PO(N) | 电流强度(A) | φA   | PCB φB |
|-------|---------|------|--------|
| 1     | 10      | 1.7  | 2.0    |
| 2     | 20      | 2.75 | 3.05   |
| 3     | 30      | 3.3  | 3.6    |
| 4     | 40      | 3.8  | 4.10   |

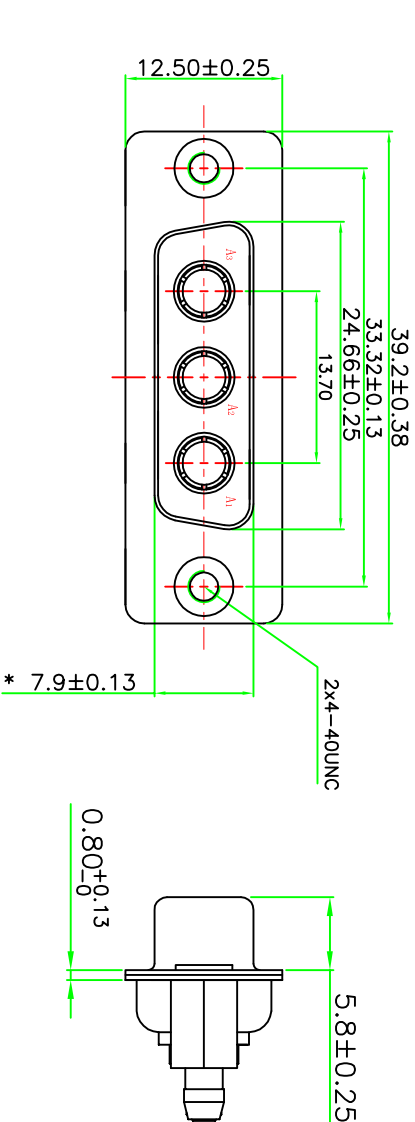

PCB LAYOUT

### MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.  
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.  
HIGHT POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.  
FORK:COPPER ALLOY MATERIAL, Ni PLATED.

### ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.  
THE WORKING VOLTAGE:300V.  
HIGH POWER CONTACT RESISTANCE:10 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.  
INSULATION RESISTANCE:2000 MEGOHMS MIN.  
TEMPERATURE RATING:-55° ~+125° .



东莞市迅颢原精密连接器有限公司  
Dongguan Signalorigin Precision Connector Co.,Ltd

| TOLERANCE:      |          | DRAWN BY :   |  | DATE :       |  | PART NAME:              |  |
|-----------------|----------|--------------|--|--------------|--|-------------------------|--|
| X               | ±0.38    | 杨剑玉          |  | 2010. 05. 15 |  | 3W3 母 电流直焊板式卿7.0鱼叉      |  |
| X.X             | ±0.25    | 候应文          |  | 2010. 05. 15 |  | MOLD NO.                |  |
| X.XX            | ±0.13    | 胡超           |  | 2010. 05. 15 |  | PS03W3FXH31000XXXXX0000 |  |
| X° ±5°          | X X° ±2° | APPROVED BY: |  | DATE :       |  | REMARK                  |  |
| UNIT: mm [inch] |          | 胡超           |  | 2010. 05. 15 |  | DRAW NO.                |  |
| SCALE:1:1       |          | SIZE: A4     |  |              |  |                         |  |