
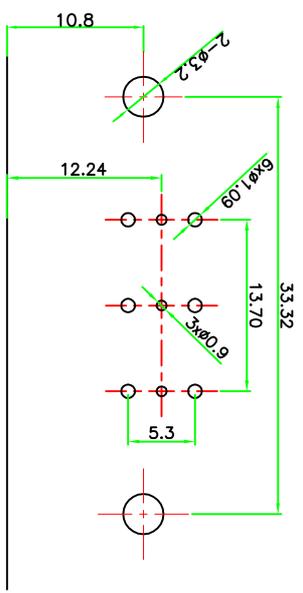
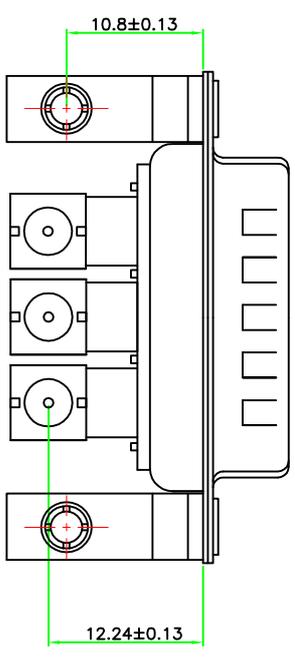
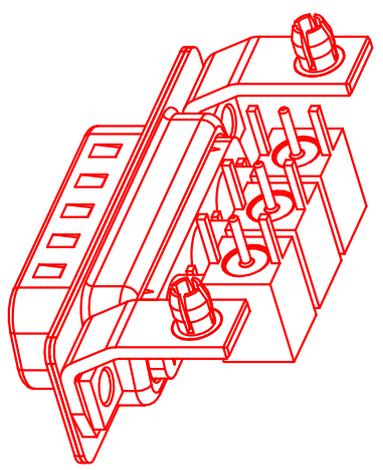
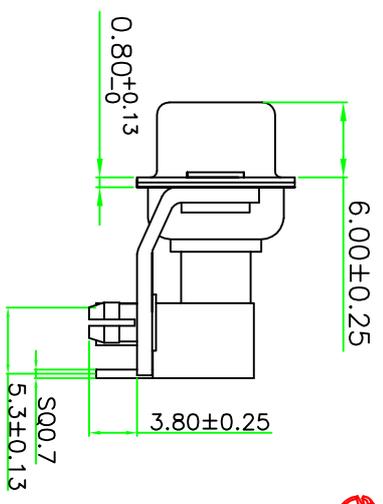


*" Pivot Dimension
ROHS Component

PO(X)	Characteristic Impedance(Ω)
5	50
7	75

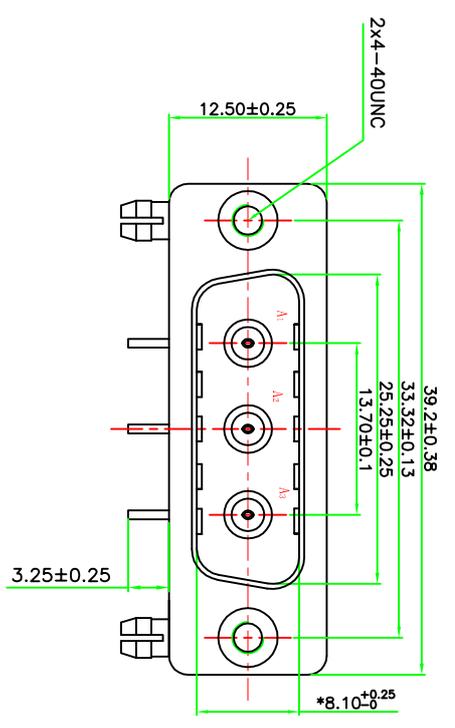

PCB LAYOUT

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
BRACKET/SCREW: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE: 50 OR 75 OHM.
THE RADIO FREQUENCY RANGE: 0-3GHz.
THE WORKING VOLTAGE: 300V.
HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125°.



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉	2010.05.15	3W3 公射频率平板式10.8支架			
X.X	±0.25	侯应文	2010.05.15	MOLD NO.		FR03W3M1H09000XXXXX0000	
X.XX	±0.13	胡超	2010.05.15	PART NO.		XH1-05-0833	
X° ±5°	X X° ±2°	胡超	2010.05.15	REMARK			
UNIT: mm [inch]		DATE :		DRAW NO.			
SCALE: 1:1		DATE :		DRAW NO.			
SIZE: A4		DATE :		DRAW NO.			