

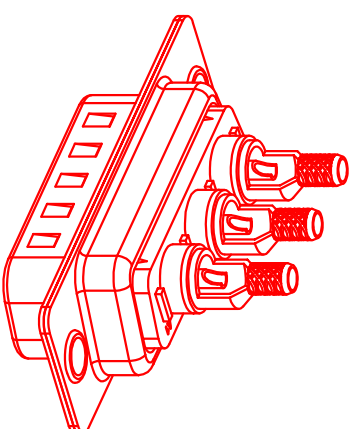
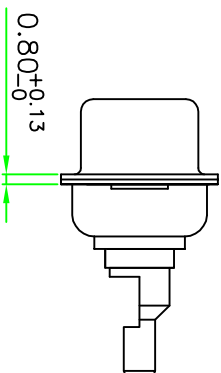


P0(X)	Characteristic Impedance (Ω)	
5	50	
7	75	

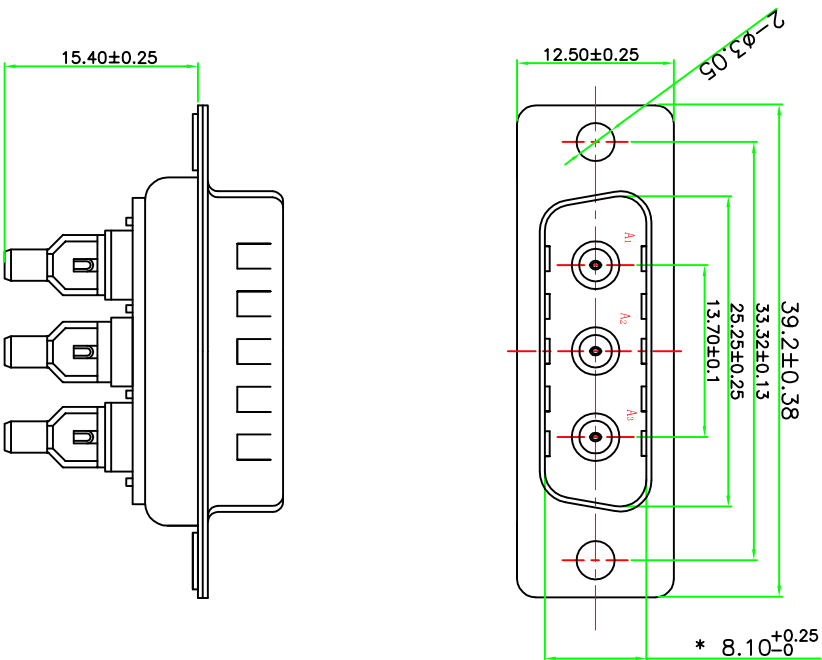

TUBE



MATERIALS AND FINISH

SHELL:STEEL OR COPPER ALLOY MATERIAL, tin/Ni OR Au FINISHED.

CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGHT FREQUENCY CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.

CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.

BRACKET/SCREW:COPPER ALLOY MATERIAL, Ni PLATED.

ELECTRICAL CHARACTERISTICS

HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OR 75 OHM.

THE RADIO FREQUENCYRANGE:0~3GHz.

THE WORKING VOLTAGE:300V.

HIGH FREQUENCY CONTACT RESISTANCE:10 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.

INSULATION RESISTANCE:2000 MEGAOHMS MIN.

TEMPERATURE RATING:-55° ~+125° .



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X. ±0.38 X.X ±0.25 X.XX ±0.13 X° ±5° X'X° ±2°	DRAWN BY : 杨剑玉	DATE : 2010. 05. 15	PART NAME: 3W3 公 射频率线式传统耦合
	CHECKED BY: 侯应文	DATE : 2010. 05. 15	PART NO. XHY-05-0807
UNIT: mm [inch]	APPROVED BY: 胡超	DATE : 2010. 05. 15	MOLD NO. PB03W3M3H000000XXXXXX0000
SCALE:1:1	SIZE: A4	DRAW NO.	REMARK