
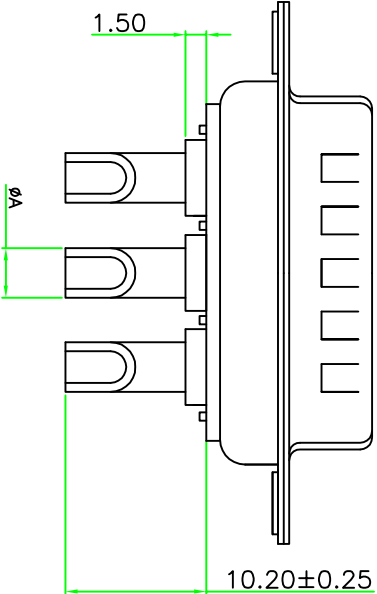
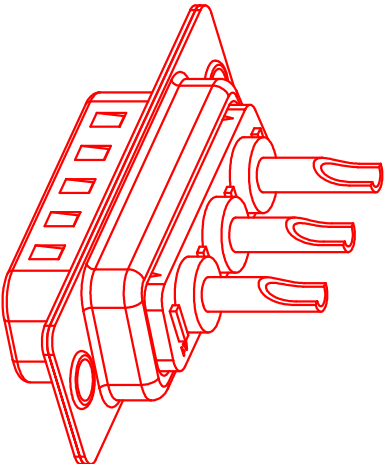
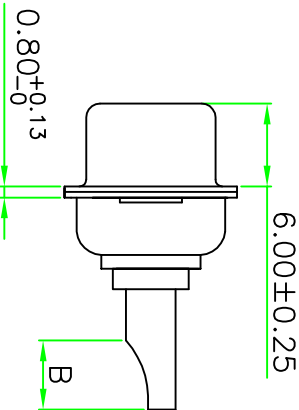


“*” Pivot Dimension

ROHS Component

P0(X)	A	B	WIRE	CURRENT RATING(A)
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

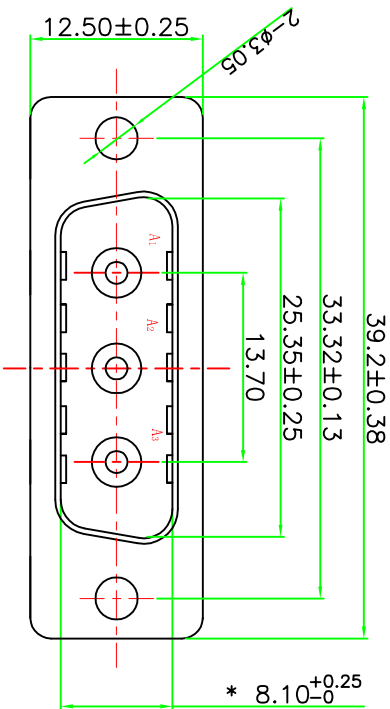

MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL,Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING:10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE:300V.
HIGH POWER CONTACT RESISTANCE:2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .



东莞市迅颢原精密连接器有限公司
Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X ±0.38 X X ±0.25 X XX ±0.13 X ° ±5° X X ° ±2°	DRAWN BY : 杨剑玉	DATE : 2010. 05. 15	PART NAME: 3W3 公 电流,焊线式传统柳合	
	CHECKED BY: 侯应文	DATE : 2010. 05. 15	PART NO. MOLD NO.	XYH-05-0801 P803W3M4H00000XXXX0000
UNITS: mm [inch]	APPROVED BY: 胡超	DATE : 2010. 05. 15	REMARK	
SCALE:1:1	SIZE: A4		DRAW NO.	