

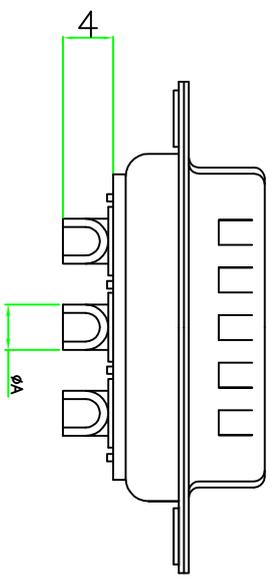
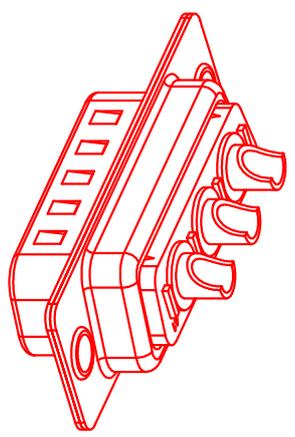


“*” Pivot Dimension
ROHS Component

NO (X)	A	WIRE	CURRENT RATING
1	2.5	12#	10A
2	3.6	10#	20A
3	4.4	8#	30A



MATERIALS AND FINISH
 SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
 HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
 HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
 THE WORKING VOLTAGE: 300V.
 HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
 TEMPERATURE RATING: -55° ~ +125° .

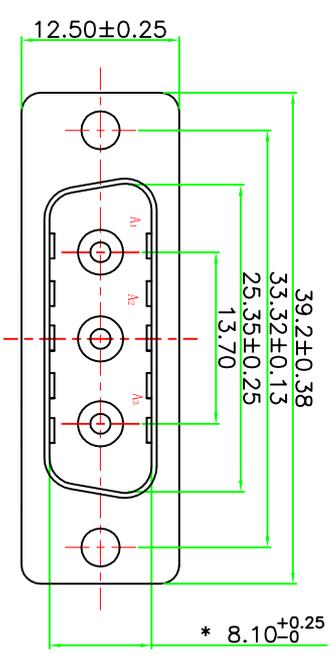

东莞市迅颢原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉	2010.05.15	3#3 公 电流短体焊线式传统耦合			
X.X	±0.25	侯应文	2010.05.15	MOLD NO.		PB03#3M#H0000XXXXX000S	
X.XX	±0.13	胡超	2010.05.15	REMARK			
X° ±5°	X.X° ±2°	DATE :		DRAW NO.			
UNIT: mm [inch]		SCALE: 1:1		SIZE: A4			