
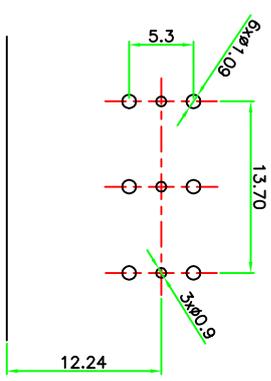
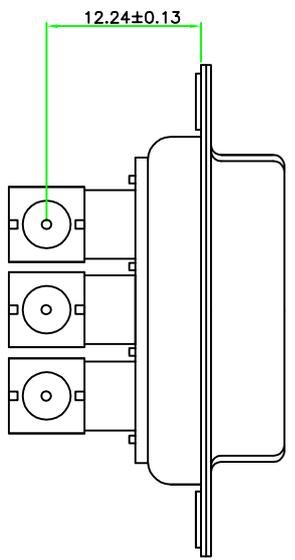
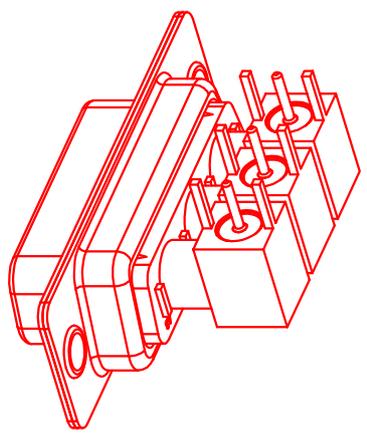
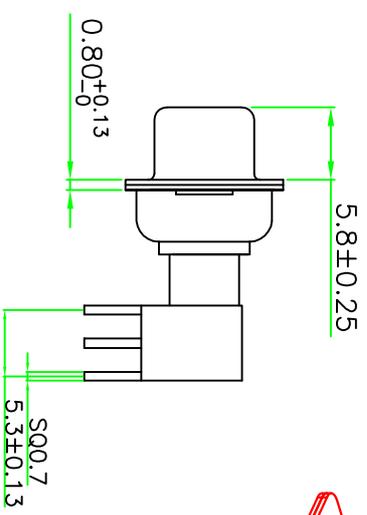


*" Pivot Dimension

ROHS Component

PO(X)	Characteristic Impedance(Ω)
5	50
7	75

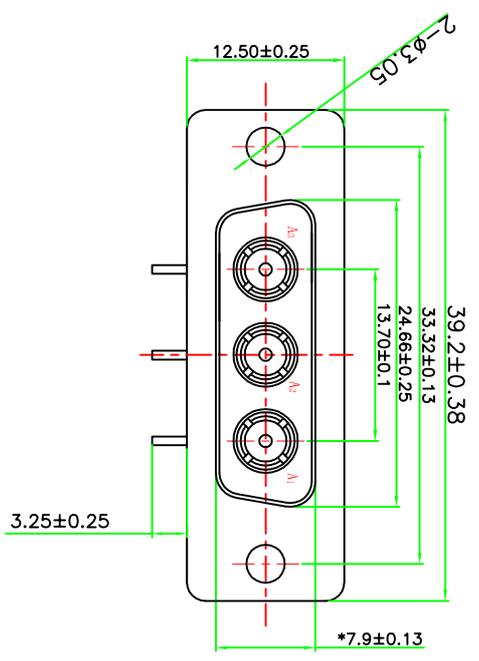

PCB LAYOUT

MATERIALS AND FINISH
 SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
 CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
 HIGH FREQUENCY CONTACT: COPPER ALLOY MATERIAL, GOLD PLATED.
 CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED.
 BRACKET/SCREW: COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
 HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE: 50 OR 75 OHM.
 THE RADIO FREQUENCY RANGE: 0-3GHz.
 THE WORKING VOLTAGE: 300V.
 HIGH FREQUENCY CONTACT RESISTANCE: 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
 INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
 TEMPERATURE RATING: -55° ~ +125°.



东莞市迅颢原精密连接器有限公司
 Dongguan Signalorigin Precision Connector Co., Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X	±0.38	杨剑玉	2010.05.15			3W3 母 射频弯板式传统耦合	
X.X	±0.25	侯应文	2010.05.15			MOLD NO. FR03W3FYH000000XXXX0000	
X.XX	±0.13	胡超	2010.05.15			PART NO. XHY-05-0806	
X° ±5°	X.X° ±2°	APPROVED BY:	DATE:	REMARK		DRAW NO.	
UNIT: mm [inch]		SCALE: 1:1		SIZE: A4			