

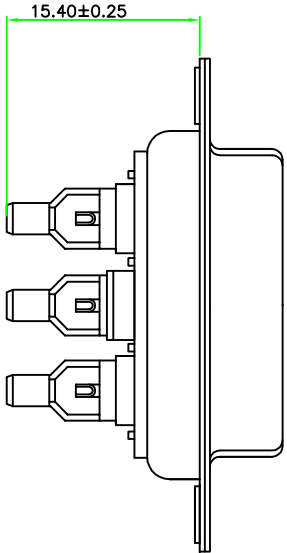

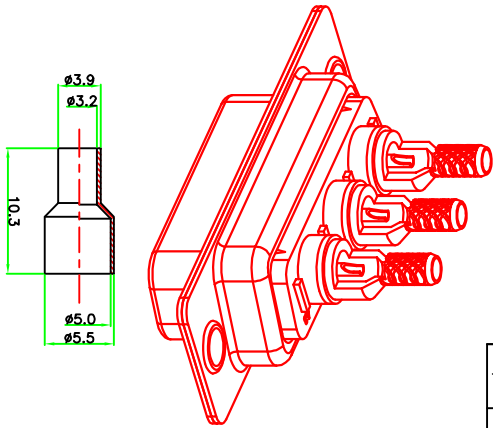


P0(X)	Characteristic Impedance (Ω)	
5	50	
7	75	



MATERIALS AND FINISH
SHELL:STEEL OR COPPER ALLOY MATERIAL, tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR:PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGHT FREQUENCY CONTACT :COPPER ALLOY MATERIAL, GOLD PLATED.
CONNECTOR WITH SIGNAL CONTACT MATERIAL: COPPER ALLOY , GOLD PLATED.
BRACKET/SCREW:COPPER ALLOY MATERIAL, Ni PLATED.
ELECTRICAL CHARACTERISTICS
HIGH FREQUENCY CONTACT CHARACTERISTIC IMPEDANCE:50 OR 75 OHM.
THE RADIO FREQUENCYRANGE:0~3GHz.
THE WORKING VOLTAGE:300V.
HIGH FREQUENCY CONTACT RESISTANCE:10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE:2000 MEGAOHMS MIN.
TEMPERATURE RATING:-55° ~+125° .

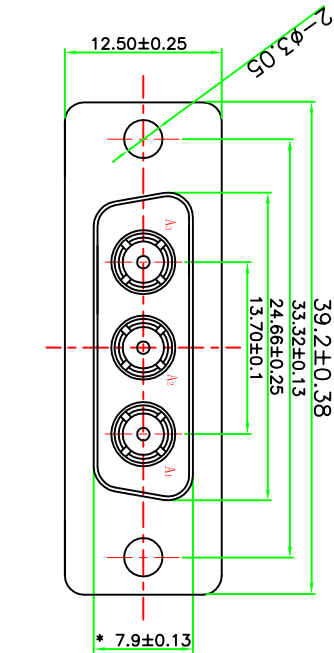

东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE:		DRAWN BY :		DATE :		PART NAME:	
X. ±0.38		杨剑玉		2010. 05. 15		3W3 母 射频焊线式传统耦合	
X.X ±0.25		CHECKED BY:		DATE :		PART NO.	
X.XY ±0.13		侯应文		2010. 05. 15		XHY-05-0808	
X° ±5° X Y° ±2°		APPROVED BY:		DATE :		MOLD NO.	
UNIT: mm [inch]		胡超		2010. 05. 15		PB03W3XH00000XXXXX0000	
SCALE:1:1		SIZE: A4		REMARK		DRAW NO.	