
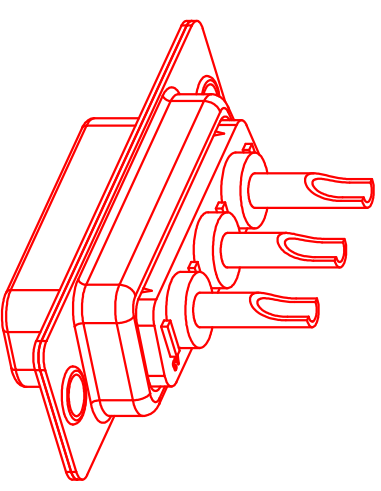
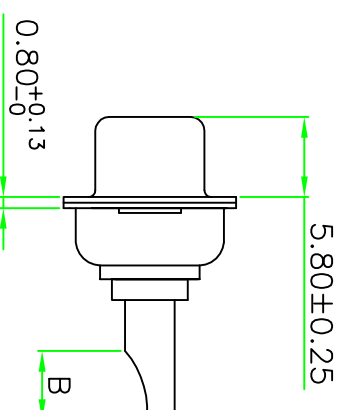



“*” Pivot Dimension

ROHS Component

P0(X)	A	B	WIRE	CURRENT(RATING (A))
1	2.5	4.5	12#	10
2	3.6	5.0	10#	20
3	4.4	5.5	8#	30
4	5.5	5.5	6#	40

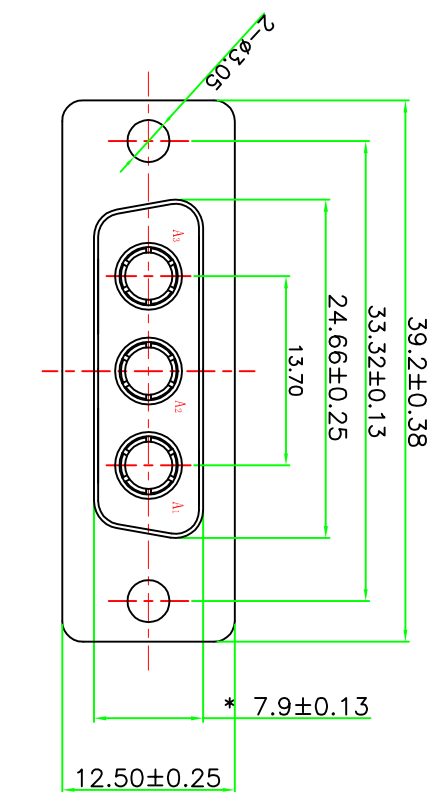

MATERIALS AND FINISH
SHELL: STEEL OR COPPER ALLOY MATERIAL, TIN/NI OR AU FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125°.

		东莞市迅颢原精密连接器有限公司 Dongguan Signalorigin Precision Connector Co., Ltd	
TOLEANCE: $X \pm 0.38$ $X.X \pm 0.25$ $X.XX \pm 0.13$ $X^{\circ} \pm 6^{\circ}$ $X.X^{\circ} \pm 2^{\circ}$		DRAWED BY : 杨剑玉	
		DATE : 2010. 05. 15	
CHECKED BY: 侯应文		PART NAME: 3W3 母 电流焊线式传统铆合	
DATE : 2010. 05. 15		PART NO.: XHY-05-0802	
APPROVED BY: 胡超		MOLD NO. PH03W3HY000000XXXX0000	
SCALE:1:1 SIZE: A4		REMARK /	
UNIT: mm (inch)		DRAW NO. /	