
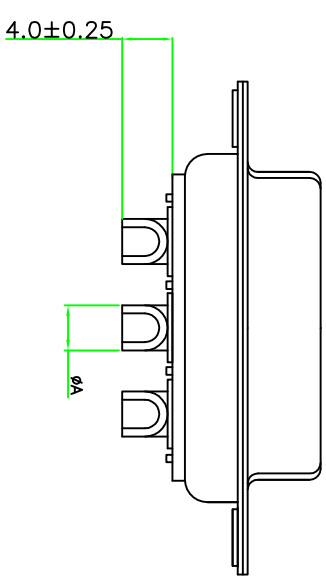
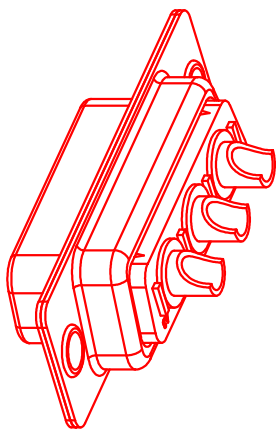



“*” Pivot Dimension

ROHS Component

NO (X)	A	WIRE	CURRENT RATING
1	2.5	12#	10A
2	3.6	10#	20A
3	4.4	8#	30A

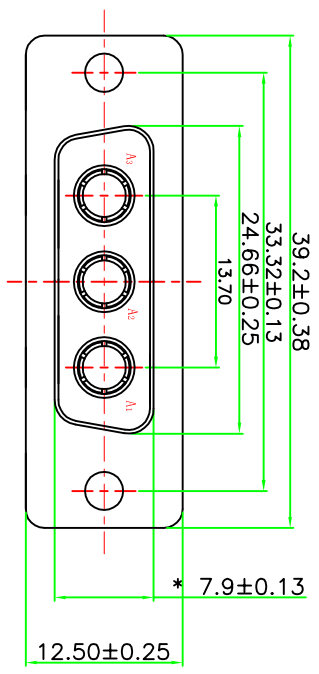

MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.
HIGH POWER CONTACT : COPPER ALLOY MATERIAL, GOLD PLATED.
ELECTRICAL CHARACTERISTICS
HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.
THE WORKING VOLTAGE: 300V.
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: -55° ~ +125° .



东莞市迅颢原精密连接器有限公司

Dongguan Signalorigin Precision Connector Co.,Ltd

TOLERANCE: X. ±0.38 X.X ±0.25 X.XX ±0.13 X° ±5° X'X° ±2°		DRAWN BY : 杨剑玉	DATE : 2010.05.15	PART NAME: 3W3 母 电流矩体焊线式传统铆合
CHECKED BY : 侯应文		DATE : 2010.05.15	PART NO. XHY-05-0818	MOLD NO. PH03W3FYH000000XXXXX000S
APPROVED BY : 胡超		DATE : 2010.05.15	REMARK	
SCALE: 1:1 SIZE: A4			DRAW NO.	